



MULTIMEDIA audio all-in-one TOUCH device, with VIVALDI supervision and control APP or via [Vivaldi Domotica iCONTROL4.0+](#), [Vivaldi Domotica iCONTROL4.1L](#).

Made in Italy, HiFi Stereo 20W+20W RMS (40+40W music).

OPERATING MODES:

- 1 stereo zone;
- 1 stereo zone + Subwoofer;
- 1 stereo zone + Subwoofer + 1 mono zone with power expansion;
- 2 stereo zones, one amplified and one with power expansion;
- 4 mono zones, two amplified and two with power expansion;
- Multiroom (connection via local network of several [Vivaldi Giove FREETOUCH](#) devices for audio synchronisation of player or auxiliary inputs);
- Intercom (connection via LAN of multiple [Vivaldi Giove FREETOUCH](#) devices for selective microphone calls or groups);

FEATURES:

- 5" display, 800x480px;
- HFP (Hands Free) profile: in Bluetooth source Hands-free function for the smartphone;
- Audio player for playback: AirPlay 2 (audio streaming. For example: YouTube, Apple Music, Amazon Music...), Spotify, Webradio, MicroSd-card, Nas;
- 2 Microphones for two-way stereo communication;
- 7-band graphic equaliser;

- Integrated DSP (Digital Signal Processor);
- Control and supervision via protocols:
 - MQTT
 - REST.API
 - KNX.TP
- Connectable devices (management by touch screen):
 - [Vivaldi Multimedia TELEMACO](#)
 - [Vivaldi Multimedia P30S](#)
 - [Vivaldi Multimedia P80S](#)
 - [Vivaldi Multimedia MATRIX6](#)

ACCESSORY DEVICES:

[Vivaldi Multimedia C4IO](#) with 4 programmable inputs. Multi-function short or long press buttons to associate two functions with each individual button. The first two inputs (buttons) can be used with rotary encoder ([Vivaldi Multimedia TVE](#) to be ordered separately) for volume control.

CONNECTIONS:

- 1x terminal for 24Vdc power supply ([Vivaldi Giove AL3B](#), [Vivaldi Giove AL5B](#) or [Vivaldi Giove AL8](#));
- 1x 8Ω passive speaker connection terminal, two configurable channels (minimum impedance 4Ω);
- 1x pre-amplified output, two configurable channels (unbalanced line signal);
- 2x unbalanced stereo analogue inputs for external sources e.g. TV, computer, etc.; 1x RJ45 connector for network connection;
- 1x RJ45 connector for connection to local LAN 10/100Mbps;
- 1x KNX TP connector;

TECHNICAL DATA:

- Stereo amplified output 2x20W RMS @ 8Ω and 2x30W RMS @ 4Ω;
- Pre-amplified stereo output;
- LAN connection 10/100Mbps; Wi-Fi: 802.11 b/g/n;
- Stereo microphone for intercommunication;
- Power supply: 24Vdc Max. 2.5A;
- Aluminium cabinet, glass display;

Other Functions:

- Presets for device configuration;
- Presets for playlist playback;
- High-pass filter for amplified audio output and low-pass filter for pre-amplified audio output Sub;
- Amplifier power-saving function, which can be activated;
- Automatic on/off function depending on the presence of a signal at the AUX1 or AUX2 input;
- Microphone for ambient listening (children, disabled, elderly..) or calls to other devices connected to the same network;
- Standby screen, selectable.
- Microphone with automatic volume sensitivity.
- Clock and alarm clock with programmable timer function for automatic switching on and/or off (e.g. Alarm and Sleep function).
- Integrated amplifier can be switched off.
- Adjustable maximum volume.

VIVALDI

- Firmware update via Internet (OTA);

Prepared for wall mounting box via 503, 504 or D60 box.

Power supply via [Vivaldi Giove AL3B](#), [Vivaldi Giove AL5B](#), [Vivaldi Giove AL8](#).

Dimensions (WxHxD) 135x92x44mm.




Weight 0.25Kg

Vivaldi srl ongoing effort to improve its products, reserves the right to make technical and aesthetic changes effectively without obligation to notice



Images


Vivaldi Giove FREETOUCH

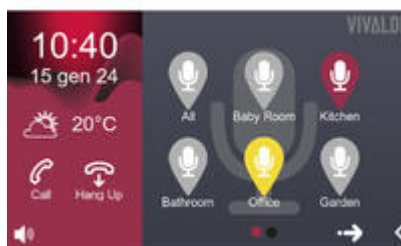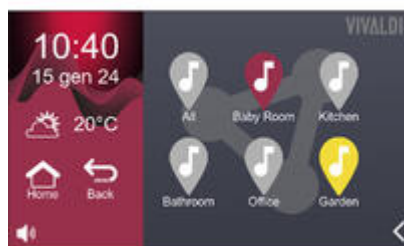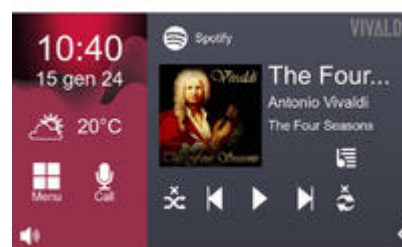

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272

VIVALDI

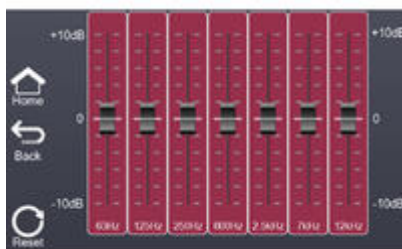

Vivaldi srl

Via E. Fermi, 8 Z.I. EST - 30020 Noventa di Piave (Venezia) ITALIA
Tel. +39 0421 307825 - info@vivaldigroup.it - www.vivaldigroup.it
P.IVA e C.F. 02880360272