



Catálogo

Cables

LINDY
CONNECTION PERFECTION

Índice

Anthra Line 4K 2.0	Página 4-20
Cable de 0.3 m	5
Cable de 0.5 m	7
Cable de 1 m	9
Cable de 2 m	11
Cable de 3 m	13
Cable de 5 m	15
Cable de 7.5 m	17
Cable de 10 m	19
 Anthra Line 8K 2.1	 Página 21-29
Cable de 0.5 m	22
Cable de 1 m	24
Cable de 2 m	26
Cable de 3 m	28
 Gold Line 8K 2.1	 Página 30-38
Cable de 1 m	31
Cable de 2 m	33
Cable de 3 m	35
Cable de 5 m	37
 Fibre Optic Hybrid 8K	 Página 39-55
Cable de 15 m	40
Cable de 20 m	42
Cable de 30 m	44
Cable de 40 m	46
Cable de 50 m	48
Cable de 60 m	50
Cable de 70 m	52
Cable de 100 m	54

Analog Audio Página 56-88

Cable de 0.5 m de 3.5mm a phono	57
Cable de 1 m de 3.5mm a phono	59
Cable de 2 m de 3.5mm a phono	61
Cable de 3 m de 3.5mm a phono	63
Cable de 5 m de 3.5mm a phono	65
Cable de 10 m de 3.5mm a phono	67
Cable de 0.5 m digital phono	69
Cable de 1 m digital phono	71
Cable de 2 m digital phono	73
Cable de 3 m digital phono	75
Cable de 0.5 m dual phono	77
Cable de 1 m dual phono	79
Cable de 2 m dual phono	81
Cable de 3 m dual phono	83
Cable de 5 m dual phono	85
Cable de 10 m dual phono	87

Optical AudioPágina 89-95

Cable de 0.5 m TosLink digital optical	90
Cable de 1 m TosLink digital optical	91
Cable de 2 m TosLink digital optical	92
Cable de 5 m TosLink digital optical	93
Cable de 10 m TosLink digital optical	94
Cable de 20 m TosLink digital optical	95

Anthra Line 4K 2.0



0.3m HDMI High Speed HDMI Cable, Anthra Line

No.: 36960

HDMI Male to Male

Description

- Professional choice High Speed HDMI 2.0 cable for commercial and high performance AV and IT installations
- Supports UHD resolutions up to 4096x2160@60Hz and HDTV resolutions up to 1080p
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 30AWG conductors
- HDMI 2.0 compliant: 3D, 4K, 18Gbps, HEC, ARC, CEC, Dolby® True HD, DTS-HD Master Audio; HDMI ATC certified
- 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:4:4 8bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® True HD.

The HDMI 2.0 specification is supported for 18Gbps bandwidth capacity in cable lengths up to 5m.

Anthra Line HDMI cables are available in lengths from 0.3m to 5m.

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions (approx.) WxDxH: 20x34.2x10.9mm [0.79x1.35x0.43in]

Cable Construction

- Length: 0.3m [1ft]
- Standard: High Speed HDMI with Ethernet

- Colour: Black
- Type: Round
- Jacket Diameter: 6mm (0.24in)
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 30AWG
- Shielding: Copper Braid, 65%

Specifications

- Supported Bandwidth: 18Gbps
- Maximum Resolution: 4096x2160@60Hz 4:4:4 8bit
- Nominal Attenuation:
 - 300kHz-825MHz <5dB
 - 825MHz-2.475GHz <5dB
 - 2.475GHz-4.125GHz <12dB
 - 4.125GHz-5.1GHz <20dB
- Minimum Band Radius: 48mm (1.89in)
- Operating Temperature: -30°C - 80°C (-22°F - 176°F)
- Storage Temperature: -10°C - 85°C (14°F - 185°F)
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36960
- EAN: 4002888369602

This product is also available in other lengths

- 36960 - 0.3m (0.98ft)
- 36961 - 0.5m (1.64ft)
- 36962 - 1m (3.28ft)
- 36963 - 2m (6.56ft)
- 36964 - 3m (9.84ft)
- 36965 - 5m (16.44ft)



0.5m HDMI High Speed HDMI Cable, Anthra Line

No.: 36961

HDMI Male to Male

Description

- Professional choice High Speed HDMI 2.0 cable for commercial and high performance AV and IT installations
- Supports UHD resolutions up to 4096x2160@60Hz and HDTV resolutions up to 1080p
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 30AWG conductors
- HDMI 2.0 compliant: 3D, 4K, 18Gbps, HEC, ARC, CEC, Dolby® True HD, DTS-HD Master Audio; HDMI ATC certified
- 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:4:4 8bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® True HD.

The HDMI 2.0 specification is supported for 18Gbps bandwidth capacity in cable lengths up to 5m.

Anthra Line HDMI cables are available in lengths from 0.3m to 5m.

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions [approx.] WxDxH: 20x34.2x10.9mm [0.79x1.35x0.43in]

Cable Construction

- Length: 0.5m [1.64ft]
- Standard: High Speed HDMI with Ethernet
- Colour: Black
- Type: Round
- Jacket Diameter: 6mm [0.24in]
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 30AWG
- Shielding: Copper Braid, 65%

Specifications

- Supported Bandwidth: 18Gbps
- Maximum Resolution: 4096x2160@60Hz 4:4:4 8bit
- Nominal Attenuation:
 - 300kHz-825MHz <5dB
 - 825MHz-2.475GHz <5dB
 - 2.475GHz-4.125GHz <12dB
 - 4.125GHz-5.1GHz <20dB
- Minimum Band Radius: 48mm [1.89in]
- Operating Temperature: -30°C - 80°C (-22°F - 176°F)
- Storage Temperature: -10°C - 85°C (14°F - 185°F)
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36961
- EAN: 4002888369602

This product is also available in other lengths

- 36960 - 0.3m [0.98ft]
- 36961 - 0.5m [1.64ft]
- 36962 - 1m [3.28ft]
- 36963 - 2m [6.56ft]
- 36964 - 3m [9.84ft]
- 36965 - 5m [16.44ft]



1m HDMI High Speed HDMI Cable, Anthra Line

No.: 36962

HDMI Male to Male

Description

- Professional choice High Speed HDMI 2.0 cable for commercial and high performance AV and IT installations
- Supports UHD resolutions up to 4096x2160@60Hz and HDTV resolutions up to 1080p
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 30AWG conductors
- HDMI 2.0 compliant: 3D, 4K, 18Gbps, HEC, ARC, CEC, Dolby® True HD, DTS-HD Master Audio; HDMI ATC certified
- 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:4:4 8bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® True HD.

The HDMI 2.0 specification is supported for 18Gbps bandwidth capacity in cable lengths up to 5m.

Anthra Line HDMI cables are available in lengths from 0.3m to 5m.

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions (approx.) WxDxH: 20x34.2x10.9mm [0.79x1.35x0.43in]

Cable Construction

- Length: 1m [3.28ft]
- Standard: High Speed HDMI with Ethernet

- Colour: Black
- Type: Round
- Jacket Diameter: 6mm [0.24in]
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 30AWG
- Shielding: Copper Braid, 65%

Specifications

- Supported Bandwidth: 18Gbps
- Maximum Resolution: 4096x2160@60Hz 4:4:4 8bit
- Nominal Attenuation:
 - 300kHz-825MHz <5dB
 - 825MHz-2.475GHz <5dB
 - 2.475GHz-4.125GHz <12dB
 - 4.125GHz-5.1GHz <20dB
- Minimum Band Radius: 48mm [1.89in]
- Operating Temperature: -30°C - 80°C [-22°F - 176°F]
- Storage Temperature: -10°C - 85°C [14°F - 185°F]
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36962
- EAN: 4002888369626

This product is also available in other lengths

- 36960 - 0.3m [0.98ft]
- 36961 - 0.5m [1.64ft]
- 36962 - 1m [3.28ft]
- 36963 - 2m [6.56ft]
- 36964 - 3m [9.84ft]
- 36965 - 5m [16.44ft]



2m HDMI High Speed HDMI Cable, Anthra Line

No.: 36963

HDMI Male to Male

Description

- Professional choice High Speed HDMI 2.0 cable for commercial and high performance AV and IT installations
- Supports UHD resolutions up to 4096x2160@60Hz and HDTV resolutions up to 1080p
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 30AWG conductors
- HDMI 2.0 compliant: 3D, 4K, 18Gbps, HEC, ARC, CEC, Dolby® True HD, DTS-HD Master Audio; HDMI ATC certified
- 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:4:4 8bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® True HD.

The HDMI 2.0 specification is supported for 18Gbps bandwidth capacity in cable lengths up to 5m.

Anthra Line HDMI cables are available in lengths from 0.3m to 5m.

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions [approx.] WxDxH: 20x34.2x10.9mm [0.79x1.35x0.43in]

Cable Construction

- Length: 2m (6.56ft)
- Standard: High Speed HDMI with Ethernet
- Colour: Black
- Type: Round
- Jacket Diameter: 6mm (0.24in)
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 30AWG
- Shielding: Copper Braid, 65%

Specifications

- Supported Bandwidth: 18Gbps
- Maximum Resolution: 4096x2160@60Hz 4:4:4 8bit
- Nominal Attenuation:
 - 300kHz-825MHz <5dB
 - 825MHz-2.475GHz <5dB
 - 2.475GHz-4.125GHz <12dB
 - 4.125GHz-5.1GHz <20dB
- Minimum Band Radius: 48mm (1.89in)
- Operating Temperature: -30°C - 80°C (-22°F - 176°F)
- Storage Temperature: -10°C - 85°C (14°F - 185°F)
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36963
- EAN: 4002888369633

This product is also available in other lengths

- 36960 - 0.3m (0.98ft)
- 36961 - 0.5m (1.64ft)
- 36962 - 1m (3.28ft)
- 36963 - 2m (6.56ft)
- 36964 - 3m (9.84ft)
- 36965 - 5m (16.44ft)



3m HDMI High Speed HDMI Cable, Anthra Line

No.: 36964

HDMI Male to Male

Description

- Professional choice High Speed HDMI 2.0 cable for commercial and high performance AV and IT installations
- Supports UHD resolutions up to 4096x2160@60Hz and HDTV resolutions up to 1080p
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 28AWG conductors
- HDMI 2.0 compliant: 3D, 4K, 18Gbps, HEC, ARC, CEC, Dolby® True HD, DTS-HD Master Audio; HDMI ATC certified
- 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:4:4 8bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® True HD.

The HDMI 2.0 specification is supported for 18Gbps bandwidth capacity in cable lengths up to 5m.

Anthra Line HDMI cables are available in lengths from 0.3m to 5m.

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions [approx.] WxDxH: 20x34.2x10.9mm [0.79x1.35x0.43in]

Cable Construction

- Length: 3m [9.84ft]
- Standard: High Speed HDMI with Ethernet
- Colour: Black
- Type: Round
- Jacket Diameter: 7.3mm [0.29in]
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: Copper Braid, 65%

Specifications

- Supported Bandwidth: 18Gbps
- Maximum Resolution: 4096x2160@60Hz 4:4:4 8bit
- Nominal Attenuation:
 - 300kHz-825MHz <5dB
 - 825MHz-2.475GHz <5dB
 - 2.475GHz-4.125GHz <12dB
 - 4.125GHz-5.1GHz <20dB
- Minimum Bend Radius: 48mm [1.89in]
- Operating Temperature: -30°C - 80°C [-22°F - 176°F]
- Storage Temperature: -10°C - 85°C [14°F - 185°F]
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36964
- EAN: 4002888369640

This product is also available in other lengths

- 36960 - 0.3m [0.98ft]
- 36961 - 0.5m [1.64ft]
- 36962 - 1m [3.28ft]
- 36963 - 2m [6.56ft]
- 36964 - 3m [9.84ft]
- 36965 - 5m [16.44ft]



5m HDMI High Speed HDMI Cable, Anthra Line

No.: 36965

HDMI Male to Male

Description

- Professional choice High Speed HDMI 2.0 cable for commercial and high performance AV and IT installations
- Supports UHD resolutions up to 4096x2160@60Hz and HDTV resolutions up to 1080p
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 28AWG conductors
- HDMI 2.0 compliant: 3D, 4K, 18Gbps, HEC, ARC, CEC, Dolby® True HD, DTS-HD Master Audio; HDMI ATC certified
- 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:4:4 8bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® True HD.

The HDMI 2.0 specification is supported for 18Gbps bandwidth capacity in cable lengths up to 5m.

Anthra Line HDMI cables are available in lengths from 0.3m to 5m.

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions [approx.] WxDxH: 20x34.2x10.9mm [0.79x1.35x0.43in]

Cable Construction

- Length: 5m (16.4ft)
- Standard: High Speed HDMI with Ethernet
- Colour: Black
- Type: Round
- Jacket Diameter: 7.3mm (0.29in)
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: Copper Braid, 65%

Specifications

- Supported Bandwidth: 18Gbps
- Maximum Resolution: 4096x2160@60Hz 4:4:4 8bit
- Nominal Attenuation:
 - 300kHz-825MHz <5dB
 - 825MHz-2.475GHz <5dB
 - 2.475GHz-4.125GHz <12dB
 - 4.125GHz-5.1GHz <20dB
- Minimum Band Radius: 48mm (1.89in)
- Operating Temperature: -30°C - 80°C (-22°F - 176°F)
- Storage Temperature: -10°C - 85°C (14°F - 185°F)
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36965
- EAN: 4002888369657

This product is also available in other lengths

- 36960 - 0.3m (0.98ft)
- 36961 - 0.5m (1.64ft)
- 36962 - 1m (3.28ft)
- 36963 - 2m (6.56ft)
- 36964 - 3m (9.84ft)
- 36965 - 5m (16.44ft)



7.5m Standard HDMI Cable, Anthra Line

No.: 36966

HDMI Male to Male

Description

- Superior performance and design Standard HDMI 2.0 cable
- Supports UHD resolutions up to 4096x2160@60Hz 4:2:0 8bit
- Robust PVC housing, gold plated connectors and contacts
- Triple shielded cable, corrosion resistant bare copper 24AWG conductors
- HDMI 2.0 compliant, 3D, 4K, 10.2Gbps, HEC, ARC, CEC, Dolby® True HD, DTS-HD Master Audio; 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 24AWG copper conductors for performance and corrosion resistance. High quality gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:2:0 8bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® True HD.

These HDMI 2.0 cables support 10.2Gbps bandwidth capacity in cable lengths from 7.5m up to 20m.

Anthra Line HDMI cables are available in lengths from 0.3m to 20m.

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: Gold
- Pin Construction: Phosphor Bronze
- Pin Plating: Gold
- Dimensions [approx.] WxDxH: 21.4x41.44x12.7mm [0.84x1.63x0.5in]

Cable Construction

- Length: 7.5m [24.61ft]
- Standard: HDMI Standard
- Colour: Black
- Type: Round
- Jacket Diameter: 9.8mm [0.39in]

- Jacket Material: PVC
- Conductor Material: Bare Copper
- Conductor Gauge: 24AWG
- Shielding: Aluminium Magnesium Alloy 55%

Specifications

- Supported Bandwidth: 10.2Gbps
- Maximum Resolution: 4096x2160@60Hz 4:2:0 8bit
- Nominal Attenuation:
 - 300kHz-825MHz --- 15dB
 - 825MHz-2.475GHz --- 15 - 29dB
 - 2.475GHz-4.125GHz --- 29 - 44dB
 - 4.125GHz-5.1GHz --- 44 - 48dB
- Minimum Band Radius: 98mm (3.86in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL

Purchasing Information

- No.: 36966
- EAN: 4002888369664

This product is also available in other lengths

- 36966 - 7.5m (24.61ft)
- 36967 - 10m (32.81ft)
- 36968 - 15m (49.21ft)
- 36969 - 20m (65.62ft)



10m Standard HDMI Cable, Anthra Line

No.: 36967

HDMI Male to Male

Description

- Superior performance and design Standard HDMI 2.0 cable
- Supports UHD resolutions up to 4096x2160@60Hz 4:2:0 8bit
- Robust PVC housing, gold plated connectors and contacts
- Triple shielded cable, corrosion resistant bare copper 24AWG conductors
- HDMI 2.0 compliant, 3D, 4K, 10.2Gbps, HEC, ARC, CEC, Dolby® True HD, DTS-HD Master Audio; 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 24AWG copper conductors for performance and corrosion resistance. High quality gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 4K 4096x2160@60Hz 4:2:0 8bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® True HD.

These HDMI 2.0 cables support 10.2Gbps bandwidth capacity in cable lengths from 7.5m up to 20m.

Anthra Line HDMI cables are available in lengths from 0.3m to 20m.

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: Gold
- Pin Construction: Phosphor Bronze
- Pin Plating: Gold
- Dimensions [approx.] WxDxH: 21.4x41.44x12.7mm [0.84x1.63x0.5in]

Cable Construction

- Length: 10m [32.81ft]
- Standard: HDMI Standard
- Colour: Black
- Type: Round
- Jacket Diameter: 9.8mm [0.39in]

- Jacket Material: PVC
- Conductor Material: Bare Copper
- Conductor Gauge: 24AWG
- Shielding: Aluminium Magnesium Alloy 55%

Specifications

- Supported Bandwidth: 10.2Gbps
- Maximum Resolution: 4096x2160@60Hz 4:2:0 8bit
- Nominal Attenuation:
 - 300kHz-825MHz --- 15dB
 - 825MHz-2.475GHz --- 15 - 29dB
 - 2.475GHz-4.125GHz --- 29 - 44dB
 - 4.125GHz-5.1GHz --- 44 - 48dB
- Minimum Band Radius: 98mm (3.86in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL

Purchasing Information

- No.: 36967
- EAN: 4002888369671

This product is also available in other lengths

- 36966 - 7.5m (24.61ft)
- 36967 - 10m (32.81ft)
- 36968 - 15m (49.21ft)
- 36969 - 20m (65.62ft)

Anthra Line 8K 2.1



0.5m Ultra High Speed HDMI Cable, Anthra Line

No.: 36951

HDMI Male to Male

Description

- Professional choice Ultra High Speed HDMI 2.1 cable for commercial and high performance AV and IT installations
- Supports resolutions up to 10240x4320 4:2:0 12bit
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 30AWG conductors
- HDMI 2.1 Ultra High speed Certified: 3D, 8k, 10K, 48Gbps, HEC, ARC, CEC, Dolby® True HD, Dolby® Atmos, DTS-HD Master Audio, DTS:X; HDMI ATC certified; 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 10k 10240x4320 4:2:0 12bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® Atmos.

The HDMI 2.1 specification is supported for 48Gbps bandwidth capacity in cable lengths up to 5m. Anthra Line HDMI cables are available in lengths from 0.5m to 3m.

HDMI 2.1 Specification cables now support the following features:

Higher Resolutions – Now up to 10k 120Hz resolution with DSC, 8k120Hz without

ALLM - automatic low latency mode – Made for Gamers, helps cut down the lag by removing advanced video processing providing the quickest response from your display.

VRR – Synchronises the source and displays refresh rate, this helps remove judder and image tearing.

Dynamic HDR – Instructed by the source a connected display can alter the HDR metadata on a scene by scene, or even frame by frame basis providing the best colour range at any time.

DSC – A high performance compression algorithm drastically reducing the signal bandwidth needed for super high resolutions.

eARC – An advanced version of ARC, using Object based audio which now provides uncompressed 7.1ch and 5.1ch and up to 192Khz, 24bit for Dolby Atmos and DTS:X

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 15µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions (approx.) WxDxH: 20x34.2x10.9mm (0.79x1.35x0.43in)

Cable Construction

- Length: 0.5m (1.64ft)
- Standard: Certified Ultra High Speed HDMI
- Colour: Black
- Type: Round
- Jacket Diameter: 6mm (0.23in)
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 30AWG
- Shielding: Aluminium Magnesium Alloy Braid, 85%

Specifications

- Supported Bandwidth: 48Gbps
- Maximum Resolution: 10240x4320@120Hz 4:2:0 12bit
- Nominal Attenuation:
 - ≤ −5 dB from 0 GHz to 1 GHz
 - −6.5 dB @ 2 GHz
 - −9.2dB @ 3 GHz
 - −16.5 dB @ 6 GHz
 - −29 dB @ 12 GHz
- Minimum Bend Radius: 80mm (3.15in)
- Operating Temperature: 0°C - 50°C (32°F - 122°F)
- Storage Temperature: 0°C - 50°C (32°F - 122°F)
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36951
- EAN: 4002888369510

This product is also available in other lengths:

- 36951 - 0.5m (1.64ft)
- 36952 - 1m (3.28ft)
- 36953 - 2m (6.56ft)
- 36954 - 3m (9.84ft)



1m Ultra High Speed HDMI Cable, Anthra Line

No.: 36952

HDMI Male to Male

Description

- Professional choice Ultra High Speed HDMI 2.1 cable for commercial and high performance AV and IT installations
- Supports resolutions up to 10240x4320 4:2:0 12bit
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 30AWG conductors
- HDMI 2.1 Ultra High speed Certified: 3D, 8K, 10K, 48Gbps, HEC, ARC, CEC, Dolby® True HD, Dolby® Atmos, DTS-HD Master Audio, DTS:X; HDMI ATC certified; 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 10k 10240x4320 4:2:0 12bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® Atmos.

The HDMI 2.1 specification is supported for 48Gbps bandwidth capacity in cable lengths up to 5m. Anthra Line HDMI cables are available in lengths from 0.5m to 3m.

HDMI 2.1 Specification cables now support the following features:

Higher Resolutions – Now up to 10k 120Hz resolution with DSC, 8k120Hz without

ALLM - automatic low latency mode – Made for Gamers, helps cut down the lag by removing advanced video processing providing the quickest response from your display.

VRR – Synchronises the source and displays refresh rate, this helps remove judder and image tearing.

Dynamic HDR – Instructed by the source a connected display can alter the HDR metadata on a scene by scene, or even frame by frame basis providing the best colour range at any time.

DSC – A high performance compression algorithm drastically reducing the signal bandwidth needed for super high resolutions.

eARC – An advanced version of ARC, using Object based audio which now provides uncompressed 7.1ch and 5.1ch and

up to 192Khz, 24bit for Dolby Atmos and DTS:X

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 15µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions (approx.) WxDxH: 20x34.2x10.9mm (0.79x1.35x0.43in)

Cable Construction

- Length: 1m (3.28ft)
- Standard: Certified Ultra High Speed HDMI
- Colour: Black
- Type: Round
- Jacket Diameter: 6mm (0.23in)
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 30AWG
- Shielding: Aluminium Magnesium Alloy Braid, 85%

Specifications

- Supported Bandwidth: 48Gbps
- Maximum Resolution: 10240x4320@120Hz 4:2:0 12bit
- Nominal Attenuation:
 - ≤ −5 dB from 0 GHz to 1 GHz
 - −6.5 dB @ 2 GHz
 - −9.2dB @ 3 GHz
 - −16.5 dB @ 6 GHz
 - −29 dB @ 12 GHz
- Minimum Bend Radius: 80mm (3.15in)
- Operating Temperature: 0°C - 50°C (32°F - 122°F)
- Storage Temperature: 0°C - 50°C (32°F - 122°F)
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36952
- EAN: 4002888369527

This product is also available in other lengths:

- 36951 - 0.5m (1.64ft)
- 36952 - 1m (3.28ft)
- 36953 - 2m (6.56ft)
- 36954 - 3m (9.84ft)



2m Ultra High Speed HDMI Cable, Anthra Line

No.: 36953

HDMI Male to Male

Description

- Professional choice Ultra High Speed HDMI 2.1 cable for commercial and high performance AV and IT installations
- Supports resolutions up to 10240x4320 4:2:0 12bit
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 30AWG conductors
- HDMI 2.1 Ultra High speed Certified: 3D, 8K, 10K, 48Gbps, HEC, ARC, CEC, Dolby® True HD, Dolby® Atmos, DTS-HD Master Audio, DTS:X; HDMI ATC certified; 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 30AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 10k 10240x4320 4:2:0 12bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® Atmos.

The HDMI 2.1 specification is supported for 48Gbps bandwidth capacity in cable lengths up to 5m. Anthra Line HDMI cables are available in lengths from 0.5m to 3m.

HDMI 2.1 Specification cables now support the following features:

Higher Resolutions – Now up to 10k 120Hz resolution with DSC, 8k120Hz without

ALLM - automatic low latency mode – Made for Gamers, helps cut down the lag by removing advanced video processing providing the quickest response from your display.

VRR – Synchronises the source and displays refresh rate, this helps remove judder and image tearing.

Dynamic HDR – Instructed by the source a connected display can alter the HDR metadata on a scene by scene, or even frame by frame basis providing the best colour range at any time.

DSC – A high performance compression algorithm drastically reducing the signal bandwidth needed for super high resolutions.

eARC – An advanced version of ARC, using Object based audio which now provides uncompressed 7.1ch and 5.1ch and up to 192Khz, 24bit for Dolby Atmos and DTS:X

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 15µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions (approx.) WxDxH: 20x34.2x10.9mm (0.79x1.35x0.43in)

Cable Construction

- Length: 2m (6.56ft)
- Standard: Certified Ultra High Speed HDMI
- Colour: Black
- Type: Round
- Jacket Diameter: 6mm (0.23in)
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 30AWG
- Shielding: Aluminium Magnesium Alloy Braid, 85%

Specifications

- Supported Bandwidth: 48Gbps
- Maximum Resolution: 10240x4320@120Hz 4:2:0 12bit
- Nominal Attenuation:
 - ≤ −5 dB from 0 GHz to 1 GHz
 - −6.5 dB @ 2 GHz
 - −9.2dB @ 3 GHz
 - −16.5 dB @ 6 GHz
 - −29 dB @ 12 GHz
- Minimum Bend Radius: 80mm (3.15in)
- Operating Temperature: 0°C - 50°C (32°F - 122°F)
- Storage Temperature: 0°C - 50°C (32°F - 122°F)
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36953
- EAN: 4002888369534

This product is also available in other lengths:

- 36951 - 0.5m (1.64ft)
- 36952 - 1m (3.28ft)
- 36953 - 2m (6.56ft)
- 36954 - 3m (9.84ft)



3m Ultra High Speed HDMI Cable, Anthra Line

No.: 36954

HDMI Male to Male

Description

- Professional choice Ultra High Speed HDMI 2.1 cable for commercial and high performance AV and IT installations
- Supports resolutions up to 10240x4320 4:2:0 12bit
- Robust PVC housing, 24K gold plated connectors and contacts
- Triple shielded cable, corrosion resistant tinned copper 28AWG conductors
- HDMI 2.1 Ultra High speed Certified: 3D, 8K, 10K, 48Gbps, HEC, ARC, CEC, Dolby® True HD, Dolby® Atmos, DTS-HD Master Audio, DTS:X; HDMI ATC certified; 10 year warranty

From the Lines cable connectivity concept developed by Lindy, Anthra Line HDMI cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line HDMI cables are premium connections that feature triple shielded with 28AWG copper conductors for performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

UHD resolutions up to 10k 10240x4320 4:2:0 12bit are supported. Anthra Line HDMI cables are also capable of transmitting 32 channel audio and Dolby® Atmos.

The HDMI 2.1 specification is supported for 48Gbps bandwidth capacity in cable lengths up to 5m. Anthra Line HDMI cables are available in lengths from 0.5m to 3m.

HDMI 2.1 Specification cables now support the following features:

Higher Resolutions – Now up to 10k 120Hz resolution with DSC, 8k120Hz without

ALLM - automatic low latency mode – Made for Gamers, helps cut down the lag by removing advanced video processing providing the quickest response from your display.

VRR – Synchronises the source and displays refresh rate, this helps remove judder and image tearing.

Dynamic HDR – Instructed by the source a connected display can alter the HDR metadata on a scene by scene, or even frame by frame basis providing the best colour range at any time.

DSC – A high performance compression algorithm drastically reducing the signal bandwidth needed for super high resolutions.

eARC – An advanced version of ARC, using Object based audio which now provides uncompressed 7.1ch and 5.1ch and up to 192Khz, 24bit for Dolby Atmos and DTS:X

Technical details

Connectors

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: PVC
- Connector Plating: 24K Gold 15µm
- Pin Construction: Phosphor Copper
- Pin Plating: 24K Gold 3µm
- Dimensions (approx.) WxDxH: 20x34.2x10.9mm (0.79x1.35x0.43in)

Cable Construction

- Length: 3m (9.84ft)
- Standard: Certified Ultra High Speed HDMI
- Colour: Black
- Type: Round
- Jacket Diameter: 7.3mm (0.28in)
- Jacket Material: PVC
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: Aluminium Magnesium Alloy Braid, 85%

Specifications

- Supported Bandwidth: 48Gbps
- Maximum Resolution: 10240x4320@120Hz 4:2:0 12bit
- Nominal Attenuation:
 - ≤ −5 dB from 0 GHz to 1 GHz
 - −6.5 dB @ 2 GHz
 - −9.2dB @ 3 GHz
 - −16.5 dB @ 6 GHz
 - −29 dB @ 12 GHz
- Minimum Bend Radius: 80mm (3.15in)
- Operating Temperature: 0°C - 50°C (32°F - 122°F)
- Storage Temperature: 0°C - 50°C (32°F - 122°F)
- ATC Approved: Yes

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH, UL, ATC

Purchasing Information

- No.: 36954
- EAN: 4002888369541

This product is also available in other lengths:

- 36951 - 0.5m (1.64ft)
- 36952 - 1m (3.28ft)
- 36953 - 2m (6.56ft)
- 36954 - 3m (9.84ft)

Gold Line 8K 2.1



1m Ultra High Speed HDMI Cable, Gold Line

No.: 37601

HDMI Male to Male

Description

- No compromise, ultimate performance certified Ultra High Speed HDMI 2.1 cable for demanding environments and mission critical systems
- Supports resolutions up to 10240x4320 4:2:0 12bit
- Full metal 24K gold plated housing, 24K gold plated connectors and contacts
- Low attenuation triple shielded cable, corrosion resistant, high performance OFC 30AWG conductors
- HDMI 2.1 Ultra High speed Certified: 3D, 4K, 48Gbps, HEC, ARC, eARC, CEC, Dolby® True HD, Dolby® Atmos, DTS-HD Master Audio, DTS:X; HDMI ATC certified; 25 year warranty

From the Lines cable connectivity concept developed by Lindy, Gold Line Ultra High Speed HDMI cables are the no compromise, high performance connection solution for use in the most demanding professional environments.

Gold Line Ultra High Speed HDMI cables feature triple shielded construction with 30AWG OFC conductors for premium performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

Resolutions up to 10K 10240x4320@120Hz 4:2:0 12bit are supported. Gold Line HDMI cables are also capable of transmitting high bit rate 32 channel audio and Dolby® Atmos.

These superior quality cables utilise a unique low attenuation design that ensures consistent and reliable transmission even over very long distances.

The HDMI 2.1 specification is supported for 48G bandwidth capacity in cable lengths up to 5m. Ultra High Speed Gold Line HDMI cables are available in lengths from 1m to 5m.

HDMI 2.1 Specification cables now support the following features:

Higher Resolutions – Now up to 10k 120Hz resolution with DSC, 8k120Hz without

ALLM - automatic low latency mode – Made for Gamers, helps cut down the lag by removing advanced video processing providing the quickest response from your display.

VRR – Synchronises the source and displays refresh rate, this helps remove judder and image tearing.

Dynamic HDR – Instructed by the source a connected display can alter the HDR metadata on a scene by scene, or even frame by frame basis providing the best colour range at any time.

DSC – A high performance compression algorithm drastically reducing the signal bandwidth needed for super high resolutions.

eARC – An advanced version of ARC, using Object based audio which now provides uncompressed 7.1ch and 5.1ch and up to 192Khz, 24bit for Dolby Atmos and DTS:X

Technical details

Connectors:

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: 24K Gold Plated Zinc Alloy
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Bronze
- Pin Plating: 24K Gold 15µm
- Dimensions [approx.] WxDxH: 20x34.1x11.6mm [0.79x1.34x0.46in]

Cable construction:

- Length: 1m [3.28ft]
- Standard: Certified Ultra High Speed HDMI
- Colour: Grey
- Type: Round
- Jacket Diameter: 6mm [0.24in]
- Jacket Material: PVC
- Conductor Material: OFC Copper
- Conductor Gauge: 30AWG
- Shielding: Tinned Copper Braid, 85%

Specifications:

- Supported Bandwidth: 48Gbps
- Maximum Resolution: 10240x4320@120Hz 4:2:0 12bit
- Nominal Attenuation: ≤- 5 dB from 0 GHz to 1 GHz
 - -6.5 dB @ 2 GHz
 - -9.2dB @ 3 GHz
 - -16.5 dB @ 6 GHz
 - -29 dB @ 12 GHz
- Minimum Bend Radius: 80mm [3.15in]
- Operating Temperature: 0°C - 50°C [32°F - 122°F]
- Storage Temperature: 0°C - 50°C [32°F - 122°F]
- ATC Approved: Yes

Miscellaneous:

- Packaging Type: Polybag
- Warranty (Years): 25
- Product Compliance: RoHS, REACH, UL, ATC

Purchasing Information:

- No.: 37601
- EAN: 4002888376013

This product is also available in other lengths:

- 37601 - 1m [3.28ft]
- 37602 - 2m [6.56ft]
- 37603 - 3m [9.84ft]
- 37604 - 5m [16.44ft]



2m Ultra High Speed HDMI Cable, Gold Line

No.: 37602

HDMI Male to Male

Description

- No compromise, ultimate performance certified Ultra High Speed HDMI 2.1 cable for demanding environments and mission critical systems
- Supports resolutions up to 10240x4320 4:2:0 12bit
- Full metal 24K gold plated housing, 24K gold plated connectors and contacts
- Low attenuation triple shielded cable, corrosion resistant, high performance OFC 30AWG conductors
- HDMI 2.1 Ultra High speed Certified: 3D, 4K, 48Gbps, HEC, ARC, eARC, CEC, Dolby® True HD, Dolby® Atmos, DTS-HD Master Audio, DTS:X; HDMI ATC certified; 25 year warranty

From the Lines cable connectivity concept developed by Lindy, Gold Line Ultra High Speed HDMI cables are the no compromise, high performance connection solution for use in the most demanding professional environments.

Gold Line Ultra High Speed HDMI cables feature triple shielded construction with 30AWG OFC conductors for premium performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

Resolutions up to 10K 10240x4320@120Hz 4:2:0 12bit are supported. Gold Line HDMI cables are also capable of transmitting high bit rate 32 channel audio and Dolby® Atmos.

These superior quality cables utilise a unique low attenuation design that ensures consistent and reliable transmission even over very long distances.

The HDMI 2.1 specification is supported for 48G bandwidth capacity in cable lengths up to 5m. Ultra High Speed Gold Line HDMI cables are available in lengths from 1m to 5m.

HDMI 2.1 Specification cables now support the following features:

Higher Resolutions – Now up to 10k 120Hz resolution with DSC, 8k120Hz without

ALLM - automatic low latency mode – Made for Gamers, helps cut down the lag by removing advanced video processing providing the quickest response from your display.

VRR – Synchronises the source and displays refresh rate, this helps remove judder and image tearing.

Dynamic HDR – Instructed by the source a connected display can alter the HDR metadata on a scene by scene, or even frame by frame basis providing the best colour range at any time.

DSC – A high performance compression algorithm drastically reducing the signal bandwidth needed for super high resolutions.

eARC – An advanced version of ARC, using Object based audio which now provides uncompressed 7.1ch and 5.1ch and up to 192Khz, 24bit for Dolby Atmos and DTS:X

Technical details

Connectors:

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: 24K Gold Plated Zinc Alloy
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Bronze
- Pin Plating: 24K Gold 15µm
- Dimensions [approx.] WxDxH: 20x34.1x11.6mm [0.79x1.34x0.46in]

Cable construction:

- Length: 1m [6.56.28ft]
- Standard: Certified Ultra High Speed HDMI
- Colour: Grey
- Type: Round
- Jacket Diameter: 6mm [0.24in]
- Jacket Material: PVC
- Conductor Material: OFC Copper
- Conductor Gauge: 30AWG
- Shielding: Tinned Copper Braid, 85%

Specifications:

- Supported Bandwidth: 48Gbps
- Maximum Resolution: 10240x4320@120Hz 4:2:0 12bit
- Nominal Attenuation: ≤- 5 dB from 0 GHz to 1 GHz
- -6.5 dB @ 2 GHz
- -9.2dB @ 3 GHz
- -16.5 dB @ 6 GHz
- -29 dB @ 12 GHz
- Minimum Bend Radius: 80mm [3.15in]
- Operating Temperature: 0°C - 50°C [32°F - 122°F]
- Storage Temperature: 0°C - 50°C [32°F - 122°F]
- ATC Approved: Yes

Miscellaneous:

- Packaging Type: Polybag
- Warranty [Years]: 25
- Product Compliance: RoHS, REACH, UL, ATC

Purchasing Information:

- No.: 37602
- EAN: 4002888376020

This product is also available in other lengths:

- 37601 - 1m [3.28ft]
- 37602 - 2m [6.56ft]
- 37603 - 3m [9.84ft]
- 37604 - 5m [16.44ft]



3m Ultra High Speed HDMI Cable, Gold Line

No.: 37603

HDMI Male to Male

Description

- No compromise, ultimate performance certified Ultra High Speed HDMI 2.1 cable for demanding environments and mission critical systems
- Supports resolutions up to 10240x4320 4:2:0 12bit
- Full metal 24K gold plated housing, 24K gold plated connectors and contacts
- Low attenuation triple shielded cable, corrosion resistant, high performance OFC 30AWG conductors
- HDMI 2.1 Ultra High speed Certified: 3D, 4K, 48Gbps, HEC, ARC, eARC, CEC, Dolby® True HD, Dolby® Atmos, DTS-HD Master Audio, DTS:X; HDMI ATC certified; 25 year warranty

From the Lines cable connectivity concept developed by Lindy, Gold Line Ultra High Speed HDMI cables are the no compromise, high performance connection solution for use in the most demanding professional environments.

Gold Line Ultra High Speed HDMI cables feature triple shielded construction with 30AWG OFC conductors for premium performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

Resolutions up to 10K 10240x4320@120Hz 4:2:0 12bit are supported. Gold Line HDMI cables are also capable of transmitting high bit rate 32 channel audio and Dolby® Atmos.

These superior quality cables utilise a unique low attenuation design that ensures consistent and reliable transmission even over very long distances.

The HDMI 2.1 specification is supported for 48G bandwidth capacity in cable lengths up to 5m. Ultra High Speed Gold Line HDMI cables are available in lengths from 1m to 5m.

HDMI 2.1 Specification cables now support the following features:

Higher Resolutions – Now up to 10k 120Hz resolution with DSC, 8k120Hz without

ALLM - automatic low latency mode – Made for Gamers, helps cut down the lag by removing advanced video processing providing the quickest response from your display.

VRR – Synchronises the source and displays refresh rate, this helps remove judder and image tearing.

Dynamic HDR – Instructed by the source a connected display can alter the HDR metadata on a scene by scene, or even frame by frame basis providing the best colour range at any time.

DSC – A high performance compression algorithm drastically reducing the signal bandwidth needed for super high resolutions.

eARC – An advanced version of ARC, using Object based audio which now provides uncompressed 7.1ch and 5.1ch and up to 192Khz, 24bit for Dolby Atmos and DTS:X

Technical details

Connectors:

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: 24K Gold Plated Zinc Alloy
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Bronze
- Pin Plating: 24K Gold 15µm
- Dimensions [approx.] WxDxH: 20x34.1x11.6mm [0.79x1.34x0.46in]

Cable construction:

- Length: 3m [9.84ft]
- Standard: Certified Ultra High Speed HDMI
- Colour: Grey
- Type: Round
- Jacket Diameter: 6mm [0.24in]
- Jacket Material: PVC
- Conductor Material: OFC Copper
- Conductor Gauge: 30AWG
- Shielding: Tinned Copper Braid, 85%

Specifications:

- Supported Bandwidth: 48Gbps
- Maximum Resolution: 10240x4320@120Hz 4:2:0 12bit
- Nominal Attenuation: ≤ - 5 dB from 0 GHz to 1 GHz
 - -6.5 dB @ 2 GHz
 - -9.2dB @ 3 GHz
 - -16.5 dB @ 6 GHz
 - -29 dB @ 12 GHz
- Minimum Bend Radius: 80mm [3.15in]
- Operating Temperature: 0°C - 50°C [32°F - 122°F]
- Storage Temperature: 0°C - 50°C [32°F - 122°F]
- ATC Approved: Yes

Miscellaneous:

- Packaging Type: Polybag
- Warranty (Years): 25
- Product Compliance: RoHS, REACH, UL, ATC

Purchasing Information:

- No.: 37603
- EAN: 4002888376037

This product is also available in other lengths:

- 37601 - 1m [3.28ft]
- 37602 - 2m [6.56ft]
- 37603 - 3m [9.84ft]
- 37604 - 5m [16.44ft]



5m Ultra High Speed HDMI Cable, Gold Line

No.: 37604

HDMI Male to Male

Description

- No compromise, ultimate performance certified Ultra High Speed HDMI 2.1 cable for demanding environments and mission critical systems
- Supports resolutions up to 10240x4320 4:2:0 12bit
- Full metal 24K gold plated housing, 24K gold plated connectors and contacts
- Low attenuation triple shielded cable, corrosion resistant, high performance OFC 26AWG conductors
- HDMI 2.1 Ultra High speed Certified: 3D, 4K, 48Gbps, HEC, ARC, eARC, CEC, Dolby® True HD, Dolby® Atmos, DTS-HD Master Audio, DTS:X; HDMI ATC certified; 25 year warranty

From the Lines cable connectivity concept developed by Lindy, Gold Line Ultra High Speed HDMI cables are the no compromise, high performance connection solution for use in the most demanding professional environments.

Gold Line Ultra High Speed HDMI cables feature triple shielded construction with 26AWG OFC conductors for premium performance and corrosion resistance. High quality 24K gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

Resolutions up to 10K 10240x4320@120Hz 4:2:0 12bit are supported. Gold Line HDMI cables are also capable of transmitting high bit rate 32 channel audio and Dolby® Atmos.

These superior quality cables utilise a unique low attenuation design that ensures consistent and reliable transmission even over very long distances.

The HDMI 2.1 specification is supported for 48G bandwidth capacity in cable lengths up to 5m. Ultra High Speed Gold Line HDMI cables are available in lengths from 1m to 5m.

HDMI 2.1 Specification cables now support the following features:

Higher Resolutions – Now up to 10k 120Hz resolution with DSC, 8k120Hz without

ALLM - automatic low latency mode – Made for Gamers, helps cut down the lag by removing advanced video processing providing the quickest response from your display.

VRR – Synchronises the source and displays refresh rate, this helps remove judder and image tearing.

Dynamic HDR – Instructed by the source a connected display can alter the HDR metadata on a scene by scene, or even frame by frame basis providing the best colour range at any time.

DSC – A high performance compression algorithm drastically reducing the signal bandwidth needed for super high resolutions.

eARC – An advanced version of ARC, using Object based audio which now provides uncompressed 7.1ch and 5.1ch and up to 192Khz, 24bit for Dolby Atmos and DTS:X

Technical details

Connectors:

- Connector A: HDMI Type A Male
- Connector B: HDMI Type A Male
- Housing Material: 24K Gold Plated Zinc Alloy
- Connector Plating: 24K Gold 3µm
- Pin Construction: Phosphor Bronze
- Pin Plating: 24K Gold 15µm
- Dimensions [approx.] WxDxH: 20x34.1x11.6mm [0.79x1.34x0.46in]

Cable construction:

- Length: 5m [16.4ft]
- Standard: Certified Ultra High Speed HDMI
- Colour: Grey
- Type: Round
- Jacket Diameter: 8mm [0.32in]
- Jacket Material: PVC
- Conductor Material: OFC Copper
- Conductor Gauge: 26AWG
- Shielding: Tinned Copper Braid, 85%

Specifications:

- Supported Bandwidth: 48Gbps
- Maximum Resolution: 10240x4320@120Hz 4:2:0 12bit
- Nominal Attenuation: ≤- 5 dB from 0 GHz to 1 GHz
 - -6.5 dB @ 2 GHz
 - -9.2dB @ 3 GHz
 - -16.5 dB @ 6 GHz
 - -29 dB @ 12 GHz
- Minimum Bend Radius: 80mm [3.15in]
- Operating Temperature: 0°C - 50°C [32°F - 122°F]
- Storage Temperature: 0°C - 50°C [32°F - 122°F]
- ATC Approved: Yes

Miscellaneous:

- Packaging Type: Polybag
- Warranty [Years]: 25
- Product Compliance: RoHS, REACH, UL, ATC

Purchasing Information:

- No.: 37604
- EAN: 4002888376044

This product is also available in other lengths:

- 37601 - 1m [3.28ft]
- 37602 - 2m [6.56ft]
- 37603 - 3m [9.84ft]
- 37604 - 5m [16.44ft]

Fibre Optic Hybrid 8K



15m Fibre Optic Hybrid HDMI 8K60 Cable

No.: 38511

AOC cable for every HDMI application and resolution

Description

- Combines copper and fibre optic cable for a hybrid, long distance HDMI connectivity solution
- Supports resolutions up to 4K@120Hz, 8K@60Hz
- HDR formats including Dolby Vision & HDR10+
- Flexible and robust cable structure for any kind of installations
- 2-Year Warranty

Lindy's range of Fibre Optic Hybrid cables are a professional solution for extending HDMI signals over longer distances. Combining the flexibility and high EMI & RFI resistance of fibre optic cable with standard copper cabling, these hybrid cables are ideal for use in critical AV setups, commercial displays or high-performance residential installations.

The internal technology provides uncompressed amplification of the HDMI signal, allowing long distance extension of HDMI 8K content that is simply not possible with passive cables.

With 48Gbps bandwidth, these cables support HDMI 2.1 resolutions up to 3840x2160@120Hz, and 7680x4320 / 10240x4320@60Hz. Content can be viewed with incredible detail and clarity at higher refresh rates for optimum viewing of movies, graphics or imagery.

As well as static HDR, HDMI hybrid cables also brings further support for dynamic HDR formats such as Dolby Vision and HDR10+. This provides every moment of content, whether scene by scene or even frame by frame, with a much wider colour gamut based on the BT.2020 colour space, higher peak brightness and deep blacks for optimum contrasts as well as greater depth of colour. This is essential for the transmission of VOD content including TV shows and movies, as well as VR and video games, ideal in eSports, retail setups and superior home cinema installations.

The advance of audio control and formats is also brought forward with HDMI. eARC support further simplifies connectivity with compatible sound systems, amplifiers and soundbars, passing lossless audio from the source to the connected output over the cable. eARC also supports high bitrate audio with a sample rate of up to 192kHz and up to 32 channels. This allows for the use of object based audio formats such as Dolby Atmos and DTS:X, truly surrounding the viewer in immersive sound to enhance and compliment the video content. This is great for multi-dimension residential setups, cinema installations, or inspiring event distribution.

Whether used with residential gaming setups or premium eSports events, these AOC cables also provide extensive features for enhancing the gaming experience, whilst also benefitting fast moving sports and entertainment content. VRR [Variable Refresh rate] reduces and eliminates lag, judder and frame tearing for a much fluid gameplay experience whether it's for quick reactions in an action game or scoring a last minute winner in sports games. ALLM [Auto Low Latency Mode] further helps this by enabling the ideal latency setting for smooth transitions of content. QFT [Quick Frame Transport] also assists with ensuring low latency, by transporting frames at a higher rate which can prove essential with real time VR gameplay. These features also benefit various other industries such as sports bar distribution,

medical facilities, experiential displays or news broadcasting.

Please Note: eARC/ARC and CEC functions are not supported for lengths over 20m.
We can make cables up to 200m on request, contact us for quotations.

Technical details

Connectors

Connector A: HDMI Type A (Male)

Connector B: HDMI Type A (Male)

Housing Material: PVC

Connector Plating: Gold Plated

Pin Construction: Gold Plated

Pin Plating: Gold Plated

Dimensions [approx.] WxDxH: HDMI Connector: 20.2x50.5x11mm [0.8x1.99x0.43in]

Cable Construction

Length: 15m [49.21ft]

Standard: HDMI 2.1

Colour: Black

Type: Round

Jacket Diameter: 4.4mm [0.17in]

Jacket Material: PVC

Conductor Material: Fiber and Copper

Conductor Gauge: 23AWG

Shielding: -

Specifications

Supported Bandwidth: 48Gbps

Maximum Resolution: 7680x4320@60Hz 4:2:0 10bit, 3840x2160@120Hz 4:4:4 10bit

Nominal Attenuation: _10dB/km@850nm, _8dB/km@1300nm

Minimum Bend Radius: 50mm [1.97in]

Operating Temperature: -10°C - 60°C [14°F - 140°F]

Storage Temperature: -20°C - 70°C [-4°F - 158°F]

Miscellaneous

Packaging Type: Carton Box

Warranty (Years): 2

Certificated: CE, UKCA, FCC, RoHS, REACH & California Proposition 65

Purchasing Information

No.: 38511

EAN: 4002888385114

This product is also available in other lengths:

38510 - 10m [32.81ft]

38512 - 20m [65.62ft]

38513 - 30m [98.42ft]

38514 - 40m [131.23ft]

38515 - 50m [164.04ft]

38516 - 60m [196.85ft]

38517 - 70m [231.95ft]

38518 - 100m [328.41ft]



20m Fibre Optic Hybrid HDMI 8K60 Cable

No.: 38512

AOC cable for every HDMI application and resolution

Description

- Combines copper and fibre optic cable for a hybrid, long distance HDMI connectivity solution
- Supports resolutions up to 4K@120Hz, 8K@60Hz
- HDR formats including Dolby Vision & HDR10+
- Flexible and robust cable structure for any kind of installations
- 2-Year Warranty

Lindy's range of Fibre Optic Hybrid cables are a professional solution for extending HDMI signals over longer distances. Combining the flexibility and high EMI & RFI resistance of fibre optic cable with standard copper cabling, these hybrid cables are ideal for use in critical AV setups, commercial displays or high-performance residential installations.

The internal technology provides uncompressed amplification of the HDMI signal, allowing long distance extension of HDMI 8K content that is simply not possible with passive cables.

With 48Gbps bandwidth, these cables support HDMI 2.1 resolutions up to 3840x2160@120Hz, and 7680x4320 / 10240x4320@60Hz. Content can be viewed with incredible detail and clarity at higher refresh rates for optimum viewing of movies, graphics or imagery.

As well as static HDR, HDMI hybrid cables also brings further support for dynamic HDR formats such as Dolby Vision and HDR10+. This provides every moment of content, whether scene by scene or even frame by frame, with a much wider colour gamut based on the BT.2020 colour space, higher peak brightness and deep blacks for optimum contrasts as well as greater depth of colour. This is essential for the transmission of VOD content including TV shows and movies, as well as VR and video games, ideal in eSports, retail setups and superior home cinema installations.

The advance of audio control and formats is also brought forward with HDMI. eARC support further simplifies connectivity with compatible sound systems, amplifiers and soundbars, passing lossless audio from the source to the connected output over the cable. eARC also supports high bitrate audio with a sample rate of up to 192kHz and up to 32 channels. This allows for the use of object based audio formats such as Dolby Atmos and DTS:X, truly surrounding the viewer in immersive sound to enhance and compliment the video content. This is great for multi-dimension residential setups, cinema installations, or inspiring event distribution.

Whether used with residential gaming setups or premium eSports events, these AOC cables also provide extensive features for enhancing the gaming experience, whilst also benefitting fast moving sports and entertainment content. VRR [Variable Refresh rate] reduces and eliminates lag, judder and frame tearing for a much fluid gameplay experience whether it's for quick reactions in an action game or scoring a last minute winner in sports games. ALLM [Auto Low Latency Mode] further helps this by enabling the ideal latency setting for smooth transitions of content. QFT [Quick Frame Transport] also assists with ensuring low latency, by transporting frames at a higher rate which can prove essential with real time VR gameplay. These features also benefit various other industries such as sports bar distribution,

medical facilities, experiential displays or news broadcasting.

Please Note: eARC/ARC and CEC functions are not supported for lengths over 20m.
We can make cables up to 200m on request, contact us for quotations.

Technical details

Connectors

Connector A: HDMI Type A (Male)
Connector B: HDMI Type A (Male)
Housing Material: PVC
Connector Plating: Gold Plated
Pin Construction: Gold Plated
Pin Plating: Gold Plated
Dimensions [approx.] WxDxH: HDMI Connector: 20.2x50.5x11mm [0.8x1.99x0.43in]

Cable Construction

Length: 20m (65.62ft)
Standard: HDMI 2.1
Colour: Black
Type: Round
Jacket Diameter: 4.4mm (0.17in)
Jacket Material: PVC
Conductor Material: Fiber and Copper
Conductor Gauge: 23AWG
Shielding: -

Specifications

Supported Bandwidth: 48Gbps
Maximum Resolution: 7680x4320@60Hz 4:2:0 10bit, 3840x2160@120Hz 4:4:4 10bit
Nominal Attenuation: _10dB/km@850nm, _8dB/km@1300nm
Minimum Bend Radius: 50mm [1.97in]
Operating Temperature: -10°C - 60°C [14°F - 140°F]
Storage Temperature: -20°C - 70°C [-4°F - 158°F]

Miscellaneous

Packaging Type: Carton Box
Warranty (Years): 2
Certificated: CE, UKCA, FCC, RoHS, REACH & California Proposition 65

Purchasing Information

No.: 38512
EAN: 4002888385121

This product is also available in other lengths:

38510 - 10m (32.81ft)
38511 - 15m (49.21ft)
38513 - 30m (98.42ft)
38514 - 40m (131.23ft)
38515 - 50m (164.04ft)
38516 - 60m (196.85ft)
38517 - 70m (231.95ft)
38518 - 100m (328.41ft)



30m Fibre Optic Hybrid HDMI 8K60 Cable

No.: 38513

AOC cable for every HDMI application and resolution

Description

- Combines copper and fibre optic cable for a hybrid, long distance HDMI connectivity solution
- Supports resolutions up to 4K@120Hz, 8K@60Hz
- HDR formats including Dolby Vision & HDR10+
- Flexible and robust cable structure for any kind of installations
- 2-Year Warranty

Lindy's range of Fibre Optic Hybrid cables are a professional solution for extending HDMI signals over longer distances. Combining the flexibility and high EMI & RFI resistance of fibre optic cable with standard copper cabling, these hybrid cables are ideal for use in critical AV setups, commercial displays or high-performance residential installations.

The internal technology provides uncompressed amplification of the HDMI signal, allowing long distance extension of HDMI 8K content that is simply not possible with passive cables.

With 48Gbps bandwidth, these cables support HDMI 2.1 resolutions up to 3840x2160@120Hz, and 7680x4320 / 10240x4320@60Hz. Content can be viewed with incredible detail and clarity at higher refresh rates for optimum viewing of movies, graphics or imagery.

As well as static HDR, HDMI hybrid cables also brings further support for dynamic HDR formats such as Dolby Vision and HDR10+. This provides every moment of content, whether scene by scene or even frame by frame, with a much wider colour gamut based on the BT.2020 colour space, higher peak brightness and deep blacks for optimum contrasts as well as greater depth of colour. This is essential for the transmission of VOD content including TV shows and movies, as well as VR and video games, ideal in eSports, retail setups and superior home cinema installations.

Whether used with residential gaming setups or premium eSports events, these AOC cables also provide extensive features for enhancing the gaming experience, whilst also benefitting fast moving sports and entertainment content. VRR (Variable Refresh rate) reduces and eliminates lag, judder and frame tearing for a much fluid gameplay experience whether it's for quick reactions in an action game or scoring a last minute winner in sports games. ALLM (Auto Low Latency Mode) further helps this by enabling the ideal latency setting for smooth transitions of content. QFT (Quick Frame Transport) also assists with ensuring low latency, by transporting frames at a higher rate which can prove essential with real time VR gameplay. These features also benefit various other industries such as sports bar distribution, medical facilities, experiential displays or news broadcasting.

Please Note: eARC/ARC and CEC functions are not supported for lengths over 20m.
We can make cables up to 200m on request, contact us for quotations.

Technical details

Connectors

Connector A: HDMI Type A (Male)

Connector B: HDMI Type A (Male)

Housing Material: PVC

Connector Plating: Gold Plated

Pin Construction: Gold Plated

Pin Plating: Gold Plated

Dimensions [approx.] WxDxH: HDMI Connector: 20.2x50.5x11mm [0.8x1.99x0.43in]

Cable Construction

Length: 30m [98.42ft]

Standard: HDMI 2.1

Colour: Black

Type: Round

Jacket Diameter: 4.4mm [0.17in]

Jacket Material: PVC

Conductor Material: Fiber and Copper

Conductor Gauge: 23AWG

Shielding: -

Specifications

Supported Bandwidth: 48Gbps

Maximum Resolution: 7680x4320@60Hz 4:2:0 10bit, 3840x2160@120Hz 4:4:4 10bit

Nominal Attenuation: _10dB/km@850nm, _8dB/km@1300nm

Minimum Bend Radius: 50mm [1.97in]

Operating Temperature: -10°C - 60°C [14°F - 140°F]

Storage Temperature: -20°C - 70°C [-4°F - 158°F]

Miscellaneous

Packaging Type: Carton Box

Warranty (Years): 2

Certificated: CE, UKCA, FCC, RoHS, REACH & California Proposition 65

Purchasing Information

No.: 38513

EAN: 4002888385138

This product is also available in other lengths:

38510 - 10m [32.81ft]

38511 - 15m [49.21ft]

38512 - 20m [65.62ft]

38514 - 40m [131.23ft]

38515 - 50m [164.04ft]

38516 - 60m [196.85ft]

38517 - 70m [231.95ft]

38518 - 100m [328.41ft]



40m Fibre Optic Hybrid HDMI 8K60 Cable

No.: 38514

AOC cable for every HDMI application and resolution

Description

- Combines copper and fibre optic cable for a hybrid, long distance HDMI connectivity solution
- Supports resolutions up to 4K@120Hz, 8K@60Hz
- HDR formats including Dolby Vision & HDR10+
- Flexible and robust cable structure for any kind of installations
- 2-Year Warranty

Lindy's range of Fibre Optic Hybrid cables are a professional solution for extending HDMI signals over longer distances. Combining the flexibility and high EMI & RFI resistance of fibre optic cable with standard copper cabling, these hybrid cables are ideal for use in critical AV setups, commercial displays or high-performance residential installations.

The internal technology provides uncompressed amplification of the HDMI signal, allowing long distance extension of HDMI 8K content that is simply not possible with passive cables.

With 48Gbps bandwidth, these cables support HDMI 2.1 resolutions up to 3840x2160@120Hz, and 7680x4320 / 10240x4320@60Hz. Content can be viewed with incredible detail and clarity at higher refresh rates for optimum viewing of movies, graphics or imagery.

As well as static HDR, HDMI hybrid cables also brings further support for dynamic HDR formats such as Dolby Vision and HDR10+. This provides every moment of content, whether scene by scene or even frame by frame, with a much wider colour gamut based on the BT.2020 colour space, higher peak brightness and deep blacks for optimum contrasts as well as greater depth of colour. This is essential for the transmission of VOD content including TV shows and movies, as well as VR and video games, ideal in eSports, retail setups and superior home cinema installations.

Whether used with residential gaming setups or premium eSports events, these AOC cables also provide extensive features for enhancing the gaming experience, whilst also benefitting fast moving sports and entertainment content. VRR (Variable Refresh rate) reduces and eliminates lag, judder and frame tearing for a much fluid gameplay experience whether it's for quick reactions in an action game or scoring a last minute winner in sports games. ALLM (Auto Low Latency Mode) further helps this by enabling the ideal latency setting for smooth transitions of content. QFT (Quick Frame Transport) also assists with ensuring low latency, by transporting frames at a higher rate which can prove essential with real time VR gameplay. These features also benefit various other industries such as sports bar distribution, medical facilities, experiential displays or news broadcasting.

Please Note: eARC/ARC and CEC functions are not supported for lengths over 20m.
We can make cables up to 200m on request, contact us for quotations.

Technical details

Connectors

Connector A: HDMI Type A (Male)
Connector B: HDMI Type A (Male)
Housing Material: PVC
Connector Plating: Gold Plated
Pin Construction: Gold Plated
Pin Plating: Gold Plated
Dimensions [approx.] WxDxH: HDMI Connector: 20.2x50.5x11mm [0.8x1.99x0.43in]

Cable Construction

Length: 40m [131.23ft]
Standard: HDMI 2.1
Colour: Black
Type: Round
Jacket Diameter: 4.4mm [0.17in]
Jacket Material: PVC
Conductor Material: Fiber and Copper
Conductor Gauge: 23AWG
Shielding: -

Specifications

Supported Bandwidth: 48Gbps
Maximum Resolution: 7680x4320@60Hz 4:2:0 10bit, 3840x2160@120Hz 4:4:4 10bit
Nominal Attenuation: _10dB/km@850nm, _8dB/km@1300nm
Minimum Bend Radius: 50mm [1.97in]
Operating Temperature: -10°C - 60°C [14°F - 140°F]
Storage Temperature: -20°C - 70°C [-4°F - 158°F]

Miscellaneous

Packaging Type: Carton Box
Warranty (Years): 2
Certificated: CE, UKCA, FCC, RoHS, REACH & California Proposition 65

Purchasing Information

No.: 38514
EAN: 4002888385145

This product is also available in other lengths:

38510 - 10m [32.81ft]
38511 - 15m [49.21ft]
38512 - 20m [65.62ft]
38513 - 30m [98.42ft]
38515 - 50m [164.04ft]
38516 - 60m [196.85ft]
38517 - 70m [231.95ft]
38518 - 100m [328.41ft]



50m Fibre Optic Hybrid HDMI 8K60 Cable

No.: 38515

AOC cable for every HDMI application and resolution

Description

- Combines copper and fibre optic cable for a hybrid, long distance HDMI connectivity solution
- Supports resolutions up to 4K@120Hz, 8K@60Hz
- HDR formats including Dolby Vision & HDR10+
- Flexible and robust cable structure for any kind of installations
- 2-Year Warranty

Lindy's range of Fibre Optic Hybrid cables are a professional solution for extending HDMI signals over longer distances. Combining the flexibility and high EMI & RFI resistance of fibre optic cable with standard copper cabling, these hybrid cables are ideal for use in critical AV setups, commercial displays or high-performance residential installations.

The internal technology provides uncompressed amplification of the HDMI signal, allowing long distance extension of HDMI 8K content that is simply not possible with passive cables.

With 48Gbps bandwidth, these cables support HDMI 2.1 resolutions up to 3840x2160@120Hz, and 7680x4320 / 10240x4320@60Hz. Content can be viewed with incredible detail and clarity at higher refresh rates for optimum viewing of movies, graphics or imagery.

As well as static HDR, HDMI hybrid cables also bring further support for dynamic HDR formats such as Dolby Vision and HDR10+. This provides every moment of content, whether scene by scene or even frame by frame, with a much wider colour gamut based on the BT.2020 colour space, higher peak brightness and deep blacks for optimum contrasts as well as greater depth of colour. This is essential for the transmission of VOD content including TV shows and movies, as well as VR and video games, ideal in eSports, retail setups and superior home cinema installations.

Whether used with residential gaming setups or premium eSports events, these AOC cables also provide extensive features for enhancing the gaming experience, whilst also benefitting fast moving sports and entertainment content. VRR (Variable Refresh rate) reduces and eliminates lag, judder and frame tearing for a much fluid gameplay experience whether it's for quick reactions in an action game or scoring a last minute winner in sports games. ALLM (Auto Low Latency Mode) further helps this by enabling the ideal latency setting for smooth transitions of content. QFT (Quick Frame Transport) also assists with ensuring low latency, by transporting frames at a higher rate which can prove essential with real time VR gameplay. These features also benefit various other industries such as sports bar distribution, medical facilities, experiential displays or news broadcasting.

Please Note: eARC/ARC and CEC functions are not supported for lengths over 20m.
We can make cables up to 200m on request, contact us for quotations.

Technical details

Connectors

Connector A: HDMI Type A (Male)

Connector B: HDMI Type A (Male)

Housing Material: PVC

Connector Plating: Gold Plated

Pin Construction: Gold Plated

Pin Plating: Gold Plated

Dimensions [approx.] WxDxH: HDMI Connector: 20.2x50.5x11mm [0.8x1.99x0.43in]

Cable Construction

Length: 50m [164.04ft]

Standard: HDMI 2.1

Colour: Black

Type: Round

Jacket Diameter: 4.4mm [0.17in]

Jacket Material: PVC

Conductor Material: Fiber and Copper

Conductor Gauge: 23AWG

Shielding: -

Specifications

Supported Bandwidth: 48Gbps

Maximum Resolution: 7680x4320@60Hz 4:2:0 10bit, 3840x2160@120Hz 4:4:4 10bit

Nominal Attenuation: _10dB/km@850nm, _8dB/km@1300nm

Minimum Bend Radius: 50mm [1.97in]

Operating Temperature: -10°C - 60°C [14°F - 140°F]

Storage Temperature: -20°C - 70°C [-4°F - 158°F]

Miscellaneous

Packaging Type: Carton Box

Warranty (Years): 2

Certificated: CE, UKCA, FCC, RoHS, REACH & California Proposition 65

Purchasing Information

No.: 38515

EAN: 4002888385152

This product is also available in other lengths:

38510 - 10m [32.81]

38511 - 15m [49.21ft]

38512 - 20m [65.62ft]

38513 - 30m [98.42ft]

38514 - 40m [131.23ft]



60m Fibre Optic Hybrid HDMI 8K60 Cable

No.: 38516

AOC cable for every HDMI application and resolution

Description

- Combines copper and fibre optic cable for a hybrid, long distance HDMI connectivity solution
- Supports resolutions up to 4K@120Hz, 8K@60Hz
- HDR formats including Dolby Vision & HDR10+
- Flexible and robust cable structure for any kind of installations
- 2-Year Warranty

Lindy's range of Fibre Optic Hybrid cables are a professional solution for extending HDMI signals over longer distances. Combining the flexibility and high EMI & RFI resistance of fibre optic cable with standard copper cabling, these hybrid cables are ideal for use in critical AV setups, commercial displays or high-performance residential installations.

The internal technology provides uncompressed amplification of the HDMI signal, allowing long distance extension of HDMI 8K content that is simply not possible with passive cables.

With 48Gbps bandwidth, these cables support HDMI 2.1 resolutions up to 3840x2160@120Hz, and 7680x4320 / 10240x4320@60Hz. Content can be viewed with incredible detail and clarity at higher refresh rates for optimum viewing of movies, graphics or imagery.

As well as static HDR, HDMI hybrid cables also brings further support for dynamic HDR formats such as Dolby Vision and HDR10+. This provides every moment of content, whether scene by scene or even frame by frame, with a much wider colour gamut based on the BT.2020 colour space, higher peak brightness and deep blacks for optimum contrasts as well as greater depth of colour. This is essential for the transmission of VOD content including TV shows and movies, as well as VR and video games, ideal in eSports, retail setups and superior home cinema installations.

Please Note: eARC/ARC and CEC functions are not supported for lengths over 20m.
We can make cables up to 200m on request, contact us for quotations.

Technical details

Connectors

- Connector A: HDMI Type A (Male)
- Connector B: HDMI Type A (Male)
- Housing Material: PVC
- Connector Plating: Gold Plated
- Pin Construction: Gold Plated
- Pin Plating: Gold Plated
- Dimensions [approx.] WxDxH: HDMI Connector: 20.2x50.5x11mm (0.8x1.99x0.43in)

Cable Construction

Length: 60m [196.85ft]
Standard: HDMI 2.1
Colour: Black
Type: Round
Jacket Diameter: 4.4mm [0.17in]
Jacket Material: PVC
Conductor Material: Fiber and Copper
Conductor Gauge: 23AWG
Shielding: -

Specifications

Supported Bandwidth: 48Gbps
Maximum Resolution: 7680x4320@60Hz 4:2:0 10bit, 3840x2160@120Hz 4:4:4 10bit
Nominal Attenuation: _10dB/km@850nm, _8dB/km@1300nm
Minimum Bend Radius: 50mm [1.97in]
Operating Temperature: -10°C - 60°C [14°F - 140°F]
Storage Temperature: -20°C - 70°C [-4°F - 158°F]

Miscellaneous

Packaging Type: Carton Box
Warranty (Years): 2
Certificated: CE, UKCA, FCC, RoHS, REACH & California Proposition 65

Purchasing Information

No.: 38516
EAN: 4002888385169

This product is also available in other lengths:

38511 - 15m [49.21ft]
38512 - 20m [65.62ft]
38513 - 30m [98.42ft]
38514 - 40m [131.23ft]
38515 - 50m [164.04ft]
38517 - 70m [231.95ft]
38518 - 100m [328.41ft]



70m Fibre Optic Hybrid HDMI 8K60 Cable

No.: 38517

AOC cable for every HDMI application and resolution

Description

- Combines copper and fibre optic cable for a hybrid, long distance HDMI connectivity solution
- Supports resolutions up to 4K@120Hz, 8K@60Hz
- HDR formats including Dolby Vision & HDR10+
- Flexible and robust cable structure for any kind of installations
- 2-Year Warranty

Lindy's range of Fibre Optic Hybrid cables are a professional solution for extending HDMI signals over longer distances. Combining the flexibility and high EMI & RFI resistance of fibre optic cable with standard copper cabling, these hybrid cables are ideal for use in critical AV setups, commercial displays or high-performance residential installations.

The internal technology provides uncompressed amplification of the HDMI signal, allowing long distance extension of HDMI 8K content that is simply not possible with passive cables.

With 48Gbps bandwidth, these cables support HDMI 2.1 resolutions up to 3840x2160@120Hz, and 7680x4320 / 10240x4320@60Hz. Content can be viewed with incredible detail and clarity at higher refresh rates for optimum viewing of movies, graphics or imagery.

As well as static HDR, HDMI hybrid cables also brings further support for dynamic HDR formats such as Dolby Vision and HDR10+. This provides every moment of content, whether scene by scene or even frame by frame, with a much wider colour gamut based on the BT.2020 colour space, higher peak brightness and deep blacks for optimum contrasts as well as greater depth of colour. This is essential for the transmission of VOD content including TV shows and movies, as well as VR and video games, ideal in eSports, retail setups and superior home cinema installations.

Please Note: eARC/ARC and CEC functions are not supported for lengths over 20m.
We can make cables up to 200m on request, contact us for quotations.

Technical details

Connectors

- Connector A: HDMI Type A (Male)
- Connector B: HDMI Type A (Male)
- Housing Material: PVC
- Connector Plating: Gold Plated
- Pin Construction: Gold Plated
- Pin Plating: Gold Plated
- Dimensions [approx.] WxDxH: HDMI Connector: 20.2x50.5x11mm (0.8x1.99x0.43in)

Cable Construction

Length: 70m [231.95ft]
Standard: HDMI 2.1
Colour: Black
Type: Round
Jacket Diameter: 4.4mm [0.17in]
Jacket Material: PVC
Conductor Material: Fiber and Copper
Conductor Gauge: 23AWG
Shielding: -

Specifications

Supported Bandwidth: 48Gbps
Maximum Resolution: 7680x4320@60Hz 4:2:0 10bit, 3840x2160@120Hz 4:4:4 10bit
Nominal Attenuation: _10dB/km@850nm, _8dB/km@1300nm
Minimum Bend Radius: 50mm [1.97in]
Operating Temperature: -10°C - 60°C [14°F - 140°F]
Storage Temperature: -20°C - 70°C [-4°F - 158°F]

Miscellaneous

Packaging Type: Carton Box
Warranty (Years): 2
Certificated: CE, UKCA, FCC, RoHS, REACH & California Proposition 65

Purchasing Information

No.: 38517
EAN: 4002888385176

This product is also available in other lengths:

38511 - 15m [49.21ft]
38512 - 20m [65.62ft]
38513 - 30m [98.42ft]
38514 - 40m [131.23ft]
38515 - 50m [164.04ft]
38516 - 60m [196.85ft]
38518 - 100m [328.41ft]



100m Fibre Optic Hybrid HDMI 8K60 Cable

No.: 38518

AOC cable for every HDMI application and resolution

Description

- Combines copper and fibre optic cable for a hybrid, long distance HDMI connectivity solution
- Supports resolutions up to 4K@120Hz, 8K@60Hz
- HDR formats including Dolby Vision & HDR10+
- Flexible and robust cable structure for any kind of installations
- 2-Year Warranty

Lindy's range of Fibre Optic Hybrid cables are a professional solution for extending HDMI signals over longer distances. Combining the flexibility and high EMI & RFI resistance of fibre optic cable with standard copper cabling, these hybrid cables are ideal for use in critical AV setups, commercial displays or high-performance residential installations.

The internal technology provides uncompressed amplification of the HDMI signal, allowing long distance extension of HDMI 8K content that is simply not possible with passive cables.

With 48Gbps bandwidth, these cables support HDMI 2.1 resolutions up to 3840x2160@120Hz, and 7680x4320 / 10240x4320@60Hz. Content can be viewed with incredible detail and clarity at higher refresh rates for optimum viewing of movies, graphics or imagery.

As well as static HDR, HDMI hybrid cables also brings further support for dynamic HDR formats such as Dolby Vision and HDR10+. This provides every moment of content, whether scene by scene or even frame by frame, with a much wider colour gamut based on the BT.2020 colour space, higher peak brightness and deep blacks for optimum contrasts as well as greater depth of colour. This is essential for the transmission of VOD content including TV shows and movies, as well as VR and video games, ideal in eSports, retail setups and superior home cinema installations.

Please Note: eARC/ARC and CEC functions are not supported for lengths over 20m.
We can make cables up to 200m on request, contact us for quotations.

Technical details

Connectors

- Connector A: HDMI Type A (Male)
- Connector B: HDMI Type A (Male)
- Housing Material: PVC
- Connector Plating: Gold Plated
- Pin Construction: Gold Plated
- Pin Plating: Gold Plated
- Dimensions [approx.] WxDxH: HDMI Connector: 20.2x50.5x11mm [0.8x1.99x0.43in]

Cable Construction

Length: 100m [328.41ft]
Standard: HDMI 2.1
Colour: Black
Type: Round
Jacket Diameter: 4.4mm [0.17in]
Jacket Material: PVC
Conductor Material: Fiber and Copper
Conductor Gauge: 23AWG
Shielding: -

Specifications

Supported Bandwidth: 48Gbps
Maximum Resolution: 7680x4320@60Hz 4:2:0 10bit, 3840x2160@120Hz 4:4:4 10bit
Nominal Attenuation: _10dB/km@850nm, _8dB/km@1300nm
Minimum Bend Radius: 50mm [1.97in]
Operating Temperature: -10°C - 60°C [14°F - 140°F]
Storage Temperature: -20°C - 70°C [-4°F - 158°F]

Miscellaneous

Packaging Type: Carton Box
Warranty (Years): 2
Certificated: CE, UKCA, FCC, RoHS, REACH & California Proposition 65

Purchasing Information

No.: 38518
EAN: 4002888385183

This product is also available in other lengths:

38511 - 15m [49.21ft]
38512 - 20m [65.62ft]
38513 - 30m [98.42ft]
38514 - 40m [131.23ft]
38515 - 50m [164.04ft]
38516 - 60m [196.85ft]
38517 - 70m [231.95ft]

Analog Audio



0.5m 3.5mm to Phono Audio Cable, Cromo Line

No.: 35332

3.5mm Male to Dual Phono Male

Description

- Connect portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy 3.5mm to Phono Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy 3.5mm to Phono Audio Cable is ideal for connecting portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV. The cable can be used in either direction and is available at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 3.5mm Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH:
 - Connector A: 6x16.7x6mm [0.24x0.66in]
 - Connector B: 10.4x25x10.4mm [0.41x0.98in]

Cable Construction

- Length: 0.5m [1.64ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG

- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35332
- EAN: 4002888353328

This product is also available in other lengths

- 35332 - 0.5m (1.64ft)
- 35333 - 1m (3.28ft)
- 35334 - 2m (6.56ft)
- 35335 - 3m (9.84ft)
- 35336 - 5m (16.4ft)
- 35337 - 10m (32.81ft)



1m 3.5mm to Phono Audio Cable, Cromo Line

No.: 35333

3.5mm Male to Dual Phono Male

Description

- Connect portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy 3.5mm to Phono Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy 3.5mm to Phono Audio Cable is ideal for connecting portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV. The cable can be used in either direction and is available at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 3.5mm Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH:
 - Connector A: 6x16.7x6mm [0.24x0.66in]
 - Connector B: 10.4x25x10.4mm [0.41x0.98in]

Cable Construction

- Length: 1m [3.28ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG

- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35333
- EAN: 4002888353335

This product is also available in other lengths

- 35332 - 0.5m (1.64ft)
- 35333 - 1m (3.28ft)
- 35334 - 2m (6.56ft)
- 35335 - 3m (9.84ft)
- 35336 - 5m (16.4ft)
- 35337 - 10m (32.81ft)



2m 3.5mm to Phono Audio Cable, Cromo Line

No.: 35334

3.5mm Male to Dual Phono Male

Description

- Connect portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy 3.5mm to Phono Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy 3.5mm to Phono Audio Cable is ideal for connecting portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV. The cable can be used in either direction and is available at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 3.5mm Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH:
 - Connector A: 6x16.7x6mm [0.24x0.66in]
 - Connector B: 10.4x25x10.4mm [0.41x0.98in]

Cable Construction

- Length: 2m [6.56ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG

- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35334
- EAN: 4002888353342

This product is also available in other lengths

- 35332 - 0.5m (1.64ft)
- 35333 - 1m (3.28ft)
- 35334 - 2m (6.56ft)
- 35335 - 3m (9.84ft)
- 35336 - 5m (16.4ft)
- 35337 - 10m (32.81ft)



3m 3.5mm to Phono Audio Cable, Cromo Line

No.: 35335

3.5mm Male to Dual Phono Male

Description

- Connect portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy 3.5mm to Phono Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy 3.5mm to Phono Audio Cable is ideal for connecting portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV. The cable can be used in either direction and is available at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 3.5mm Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH:
 - Connector A: 6x16.7x6mm [0.24x0.66in]
 - Connector B: 10.4x25x10.4mm [0.41x0.98in]

Cable Construction

- Length: 3m [9.84ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG

- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35335
- EAN: 4002888353359

This product is also available in other lengths

- 35332 - 0.5m (1.64ft)
- 35333 - 1m (3.28ft)
- 35334 - 2m (6.56ft)
- 35335 - 3m (9.84ft)
- 35336 - 5m (16.4ft)
- 35337 - 10m (32.81ft)



5m 3.5mm to Phono Audio Cable, Cromo Line

No.: 35336

3.5mm Male to Dual Phono Male

Description

- Connect portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy 3.5mm to Phono Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy 3.5mm to Phono Audio Cable is ideal for connecting portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV. The cable can be used in either direction and is available at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 3.5mm Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH:
 - Connector A: 6x16.7x6mm [0.24x0.66in]
 - Connector B: 10.4x25x10.4mm [0.41x0.98in]

Cable Construction

- Length: 5m [16.4ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG

- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35336
- EAN: 4002888353366

This product is also available in other lengths

- 35332 - 0.5m (1.64ft)
- 35333 - 1m (3.28ft)
- 35334 - 2m (6.56ft)
- 35335 - 3m (9.84ft)
- 35336 - 5m (16.4ft)
- 35337 - 10m (32.81ft)



10m 3.5mm to Phono Audio Cable, Cromo Line

No.: 35337

3.5mm Male to Dual Phono Male

Description

- Connect portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy 3.5mm to Phono Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy 3.5mm to Phono Audio Cable is ideal for connecting portable devices with a 3.5mm socket to Hi-fi separates, sound bars or to your TV. The cable can be used in either direction and is available at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 3.5mm Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH:
 - Connector A: 6x16.7x6mm [0.24x0.66in]
 - Connector B: 10.4x25x10.4mm [0.41x0.98in]

Cable Construction

- Length: 10m [32.81ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG

- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35337
- EAN: 4002888353373

This product is also available in other lengths

- 35332 - 0.5m (1.64ft)
- 35333 - 1m (3.28ft)
- 35334 - 2m (6.56ft)
- 35335 - 3m (9.84ft)
- 35336 - 5m (16.4ft)
- 35337 - 10m (32.81ft)



0.5m Digital Phono Audio Cable, Cromo Line

No.: 35338

Digital Coaxia Male to Male

Description

- Connect devices with a digital audio signal such as TVs and PCs to AV equipment including surround sound setups and DJ music systems
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Digital [Phono] Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Digital [Phono] Audio Cable is ideal for digital audio devices including TVs, PCs and DVD Players when connecting to equipment such as digital surround sound setups or AV Amplifiers, and DJ music systems.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers [TPE] for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 1xPhono [RCA] Male
- Connector B: 1xPhono [RCA] Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH: 10.4x25x10.4 mm [0.41x0.98in]

Cable Construction

- Length: 0.5m [1.64ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35338
- EAN: 4002888353380

This product is also available in other lengths

- 35338 - 0.5m (1.64ft)
- 35339 - 1m (3.28ft)
- 35340 - 2m (6.56ft)
- 35341 - 3m (9.84ft)
- 35342 - 5m (16.4ft)
- 35343 - 10m (32.81ft)

© LINDY 2025



1m Digital Phono Audio Cable, Cromo Line

No.: 35339

Digital Coaxia Male to Male

Description

- Connect devices with a digital audio signal such as TVs and PCs to AV equipment including surround sound setups and DJ music systems
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Digital [Phono] Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Digital [Phono] Audio Cable is ideal for digital audio devices including TVs, PCs and DVD Players when connecting to equipment such as digital surround sound setups or AV Amplifiers, and DJ music systems.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers [TPE] for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 1xPhono [RCA] Male
- Connector B: 1xPhono [RCA] Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH: 10.4x25x10.4 mm [0.41x0.98in]

Cable Construction

- Length: 1m [3.28ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35339
- EAN: 4002888353397

This product is also available in other lengths

- 35338 - 0.5m (1.64ft)
- 35339 - 1m (3.28ft)
- 35340 - 2m (6.56ft)
- 35341 - 3m (9.84ft)
- 35342 - 5m (16.4ft)
- 35343 - 10m (32.81ft)



2m Digital Phono Audio Cable, Cromo Line

No.: 35340

Digital Coaxia Male to Male

Description

- Connect devices with a digital audio signal such as TVs and PCs to AV equipment including surround sound setups and DJ music systems
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Digital [Phono] Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Digital [Phono] Audio Cable is ideal for digital audio devices including TVs, PCs and DVD Players when connecting to equipment such as digital surround sound setups or AV Amplifiers, and DJ music systems.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers [TPE] for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 1xPhono [RCA] Male
- Connector B: 1xPhono [RCA] Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions [approx.] WxDxH: 10.4x25x10.4 mm [0.41x0.98in]

Cable Construction

- Length: 2m [6.56ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Bend Radius: 30mm [1.18in]

- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35340
- EAN: 4002888353403

This product is also available in other lengths

- 35338 - 0.5m [1.64ft]
- 35339 - 1m [3.28ft]
- 35340 - 2m [6.56ft]
- 35341 - 3m [9.84ft]
- 35342 - 5m [16.4ft]
- 35343 - 10m [32.81ft]



3m Digital Phono Audio Cable, Cromo Line

No.: 35341

Digital Coaxia Male to Male

Description

- Connect devices with a digital audio signal such as TVs and PCs to AV equipment including surround sound setups and DJ music systems
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Digital [Phono] Audio Cable Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Digital [Phono] Audio Cable is ideal for digital audio devices including TVs, PCs and DVD Players when connecting to equipment such as digital surround sound setups or AV Amplifiers, and DJ music systems.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 1xPhono (RCA) Male
- Connector B: 1xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions (approx.) WxDxH: 10.4x25x10.4 mm (0.41x0.98in)

Cable Construction

- Length: 3m (9.84ft)
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm (0.12in)
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Band Radius: 30mm (1.18in)
- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35341
- EAN: 4002888353410

This product is also available in other lengths

- 35338 - 0.5m (1.64ft)
- 35339 - 1m (3.28ft)
- 35340 - 2m (6.56ft)
- 35341 - 3m (9.84ft)
- 35342 - 5m (16.4ft)
- 35343 - 10m (32.81ft)



0.5m Dual Phono Audio Cable, Cromo Line

No.: 35344

Dual Phono Male to Male

Description

- Connect Hi-Fi separates or soundbars to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Dual Phono Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Dual Phono Audio Cable is great for connecting Hi-fi separates or a sound bar to your TV. The left and right channels can connect any audio and video devices with the same Phono connectors at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 2xPhono (RCA) Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions (approx.) WxDxH: 10.4x25x10.4 mm [0.41x0.98in]

Cable Construction

- Length: 0.5m [1.64ft]
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm [0.12in]
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Bend Radius: 30mm [1.18in]

- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35344
- EAN: 4002888353441

This product is also available in other lengths

- 35344 - 0.5m [1.64ft]
- 35345 - 1m [3.28ft]
- 35346 - 2m [6.56ft]
- 35347 - 3m [9.84ft]
- 35348 - 5m [16.4ft]
- 35349 - 10m [32.81ft]



1m Dual Phono Audio Cable, Cromo Line

No.: 35345

Dual Phono Male to Male

Description

- Connect Hi-Fi separates or soundbars to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Dual Phono Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Dual Phono Audio Cable is great for connecting Hi-fi separates or a sound bar to your TV. The left and right channels can connect any audio and video devices with the same Phono connectors at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 2xPhono (RCA) Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions (approx.) WxDxH: 10.4x25x10.4 mm (0.41x0.98in)

Cable Construction

- Length: 1m (3.28ft)
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm (0.12in)
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Bend Radius: 30mm (1.18in)

- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35345
- EAN: 4002888353458

This product is also available in other lengths

- 35344 - 0.5m [1.64ft]
- 35345 - 1m [3.28ft]
- 35346 - 2m [6.56ft]
- 35347 - 3m [9.84ft]
- 35348 - 5m [16.4ft]
- 35349 - 10m [32.81ft]



2m Dual Phono Audio Cable, Cromo Line

No.: 35346

Dual Phono Male to Male

Description

- Connect Hi-Fi separates or soundbars to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Dual Phono Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Dual Phono Audio Cable is great for connecting Hi-fi separates or a sound bar to your TV. The left and right channels can connect any audio and video devices with the same Phono connectors at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 2xPhono (RCA) Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions (approx.) WxDxH: 10.4x25x10.4 mm (0.41x0.98in)

Cable Construction

- Length: 2m (6.56ft)
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm (0.12in)
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Bend Radius: 30mm (1.18in)

- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35346
- EAN: 4002888353465

This product is also available in other lengths

- 35344 - 0.5m [1.64ft]
- 35345 - 1m [3.28ft]
- 35346 - 2m [6.56ft]
- 35347 - 3m [9.84ft]
- 35348 - 5m [16.4ft]
- 35349 - 10m [32.81ft]



3m Dual Phono Audio Cable, Cromo Line

No.: 35347

Dual Phono Male to Male

Description

- Connect Hi-Fi separates or soundbars to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Dual Phono Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Dual Phono Audio Cable is great for connecting Hi-fi separates or a sound bar to your TV. The left and right channels can connect any audio and video devices with the same Phono connectors at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 2xPhono (RCA) Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions (approx.) WxDxH: 10.4x25x10.4 mm (0.41x0.98in)

Cable Construction

- Length: 3m (9.84ft)
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm (0.12in)
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Bend Radius: 30mm (1.18in)

- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35347
- EAN: 4002888353472

This product is also available in other lengths

- 35344 - 0.5m [1.64ft]
- 35345 - 1m [3.28ft]
- 35346 - 2m [6.56ft]
- 35347 - 3m [9.84ft]
- 35348 - 5m [16.4ft]
- 35349 - 10m [32.81ft]



5m Dual Phono Audio Cable, Cromo Line

No.: 35348

Dual Phono Male to Male

Description

- Connect Hi-Fi separates or soundbars to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Dual Phono Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Dual Phono Audio Cable is great for connecting Hi-fi separates or a sound bar to your TV. The left and right channels can connect any audio and video devices with the same Phono connectors at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 2xPhono (RCA) Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions (approx.) WxDxH: 10.4x25x10.4 mm (0.41x0.98in)

Cable Construction

- Length: 5m (16.4ft)
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm (0.12in)
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Bend Radius: 30mm (1.18in)

- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35348
- EAN: 4002888353489

This product is also available in other lengths

- 35344 - 0.5m [1.64ft]
- 35345 - 1m [3.28ft]
- 35346 - 2m [6.56ft]
- 35347 - 3m [9.84ft]
- 35348 - 5m [16.4ft]
- 35349 - 10m [32.81ft]



10m Dual Phono Audio Cable, Cromo Line

No.: 35349

Dual Phono Male to Male

Description

- Connect Hi-Fi separates or soundbars to your TV
- Premium quality, highly flexible cable
- Low profile 24K gold plated connectors for optimum conductive ability
- PVC and halogen free design
- 10 year warranty

The Cromo Line Lindy Dual Phono Audio Cable is a high quality, flexible cable, ideal for use with hi-fi and audio equipment. It provides premium quality cable construction at an affordable price and features 24K gold plated contacts for optimum conductive ability and resistance to tarnishing and corrosion.

The Lindy Dual Phono Audio Cable is great for connecting Hi-fi separates or a sound bar to your TV. The left and right channels can connect any audio and video devices with the same Phono connectors at distances up to 10m.

PVC and Halogen free design: These cables are made using Thermoplastic Elastomers (TPE) for the jacket and nylon insulation for the inner conductors. They are completely PVC and halogen free in line with EU directives which aim to limit the use of PVC and the toxic additives contained in typical cable designs.

Technical details

Connectors

- Connector A: 2xPhono (RCA) Male
- Connector B: 2xPhono (RCA) Male
- Housing Material: Brass with Copper Shell
- Connector Plating: Chrome Plating
- Pin Construction: Brass
- Pin Plating: Gold-Plated Flash
- Dimensions (approx.) WxDxH: 10.4x25x10.4 mm (0.41x0.98in)

Cable Construction

- Length: 10m (32.81ft)
- Colour: Anthracite
- Type: Round
- Jacket Diameter: 3mm (0.12in)
- Jacket Material: Thermoplastic Elastomers
- Conductor Material: Copper
- Conductor Gauge: 28AWG
- Shielding: -

Specifications

- Minimum Bend Radius: 30mm (1.18in)

- Operating Temperature: -20°C - 80°C (-4°F - 176°F)
- Storage Temperature: -25°C - 85°C (-13°F - 185°F)

Miscellaneous

- Packaging Type: Polybag
- Warranty (Years): 10
- Certificated: RoHS, REACH

Purchasing Information

- No.: 35349
- EAN: 4002888353496

This product is also available in other lengths

- 35344 - 0.5m [1.64ft]
- 35345 - 1m [3.28ft]
- 35346 - 2m [6.56ft]
- 35347 - 3m [9.84ft]
- 35348 - 5m [16.4ft]
- 35349 - 10m [32.81ft]

Optical Audio



TosLink SPDIF Digital Optical Cable, 0.5m

No.: 35210

Connect audio devices via optical SPDIF connection

Description

- TosLink Male to TosLink Male
- High quality fibre optic cable ensures crystal clear digital audio transmission
- For use with many modern Dolby Digital (Dolby 5.1, 6.1, AC3, Prologic, etc.) and DTS surround sound receivers, DVD players, MD players and recorders, MP3 and DAT recorders, professional Audio Cards for Computer Digital Audio workstations, Outboard AD/DA Converters and satellite dish receivers
- Compatible with all SPDIF (Sony-Philips Digital Interface Format), ADAT's, DAW's and Dolby Digital DTS audio devices using the TosLink interface
- Immune to electrical interference
- Protective shell, outer diameter 2.2mm

This digital optical cable is part of a wide range from LINDY including , and cables.

Please note: These cables come with a protective dust cap on each end of the cable. Remove this before installation.



TosLink SPDIF Digital Optical Cable, 1m

No.: 35211

Connect audio devices via optical SPDIF connection

Description

- TosLink Male to TosLink Male
- High quality fibre optic cable ensures crystal clear digital audio transmission
- For use with many modern Dolby Digital (Dolby 5.1, 6.1, AC3, Prologic, etc.) and DTS surround sound receivers, DVD players, MD players and recorders, MP3 and DAT recorders, professional Audio Cards for Computer Digital Audio workstations, Outboard AD/DA Converters and satellite dish receivers
- Compatible with all SPDIF (Sony-Philips Digital Interface Format), ADAT's, DAW's and Dolby Digital DTS audio devices using the TosLink interface
- Immune to electrical interference
- Protective shell, outer diameter 2.2mm

This digital optical cable is part of a wide range from LINDY including , and cables.

Please note: These cables come with a protective dust cap on each end of the cable. Remove this before installation.



TosLink SPDIF Digital Optical Cable, 2m

No.: 35212

Connect audio devices via optical SPDIF connection

Description

- TosLink Male to TosLink Male
- High quality fibre optic cable ensures crystal clear digital audio transmission
- For use with many modern Dolby Digital (Dolby 5.1, 6.1, AC3, Prologic, etc.) and DTS surround sound receivers, DVD players, MD players and recorders, MP3 and DAT recorders, professional Audio Cards for Computer Digital Audio workstations, Outboard AD/DA Converters and satellite dish receivers
- Compatible with all SPDIF (Sony-Philips Digital Interface Format), ADAT's, DAW's and Dolby Digital DTS audio devices using the TosLink interface
- Immune to electrical interference
- Protective shell, outer diameter 2.2mm

This digital optical cable is part of a wide range from LINDY including , and cables.

Please note: These cables come with a protective dust cap on each end of the cable. Remove this before installation.



TosLink SPDIF Digital Optical Cable, 5m

No.: 35214

Connect audio devices via optical SPDIF connection

Description

- TosLink Male to TosLink Male
- High quality fibre optic cable ensures crystal clear digital audio transmission
- For use with many modern Dolby Digital (Dolby 5.1, 6.1, AC3, Prologic, etc.) and DTS surround sound receivers, DVD players, MD players and recorders, MP3 and DAT recorders, professional Audio Cards for Computer Digital Audio workstations, Outboard AD/DA Converters and satellite dish receivers
- Compatible with all SPDIF (Sony-Philips Digital Interface Format), ADAT's, DAW's and Dolby Digital DTS audio devices using the TosLink interface
- Immune to electrical interference
- Protective shell, outer diameter 2.2mm

This digital optical cable is part of a wide range from LINDY including , and cables.

Please note: These cables come with a protective dust cap on each end of the cable. Remove this before installation.



TosLink SPDIF Digital Optical Cable, 10m

No.: 35215

Connect audio devices via optical SPDIF connection

Description

- TosLink Male to TosLink Male
- High quality fibre optic cable ensures crystal clear digital audio transmission
- For use with many modern Dolby Digital (Dolby 5.1, 6.1, AC3, Prologic, etc.) and DTS surround sound receivers, DVD players, MD players and recorders, MP3 and DAT recorders, professional Audio Cards for Computer Digital Audio workstations, Outboard AD/DA Converters and satellite dish receivers
- Compatible with all SPDIF (Sony-Philips Digital Interface Format), ADAT's, DAW's and Dolby Digital DTS audio devices using the TosLink interface
- Immune to electrical interference
- Protective shell, outer diameter 2.2mm

This digital optical cable is part of a wide range from LINDY including , and cables.

Please note: These cables come with a protective dust cap on each end of the cable. Remove this before installation.



TosLink SPDIF Digital Optical Cable, 20m

No.: 35217


Connect audio devices via optical SPDIF connection

Description

- TosLink Male to TosLink Male
- High quality fibre optic cable ensures crystal clear digital audio transmission
- For use with many modern Dolby Digital (Dolby 5.1, 6.1, AC3, Prologic, etc.) and DTS surround sound receivers, DVD players, MD players and recorders, MP3 and DAT recorders, professional Audio Cards for Computer Digital Audio workstations, Outboard AD/DA Converters and satellite dish receivers
- Compatible with all SPDIF (Sony-Philips Digital Interface Format), ADAT's, DAW's and Dolby Digital DTS audio devices using the TosLink interface
- Immune to electrical interference
- Protective shell, outer diameter 2.2mm

This digital optical cable is part of a wide range from LINDY including , and cables.

Please note: These cables come with a protective dust cap on each end of the cable. Remove this before installation.

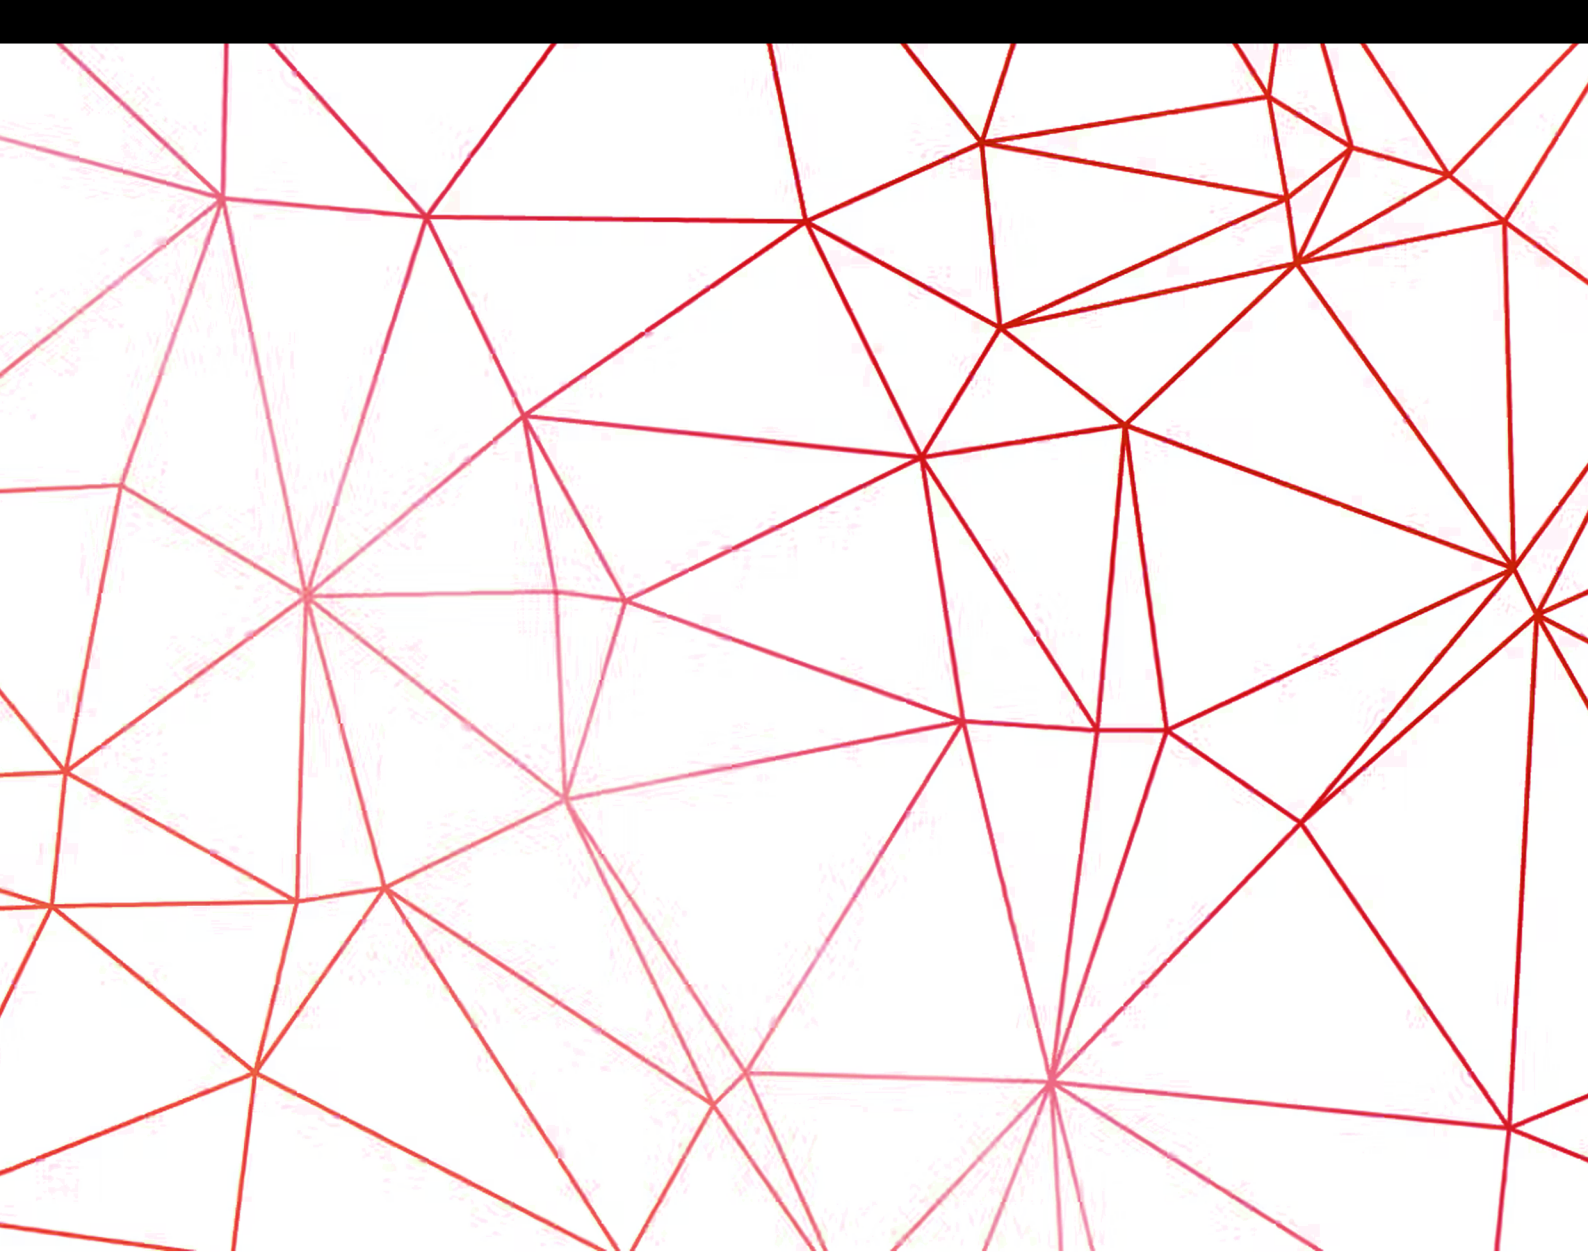

loeq@loeq.es

www.loeq.es

LIGHT & SOUND EQUIPMENT SL
C/Mossèn Jaume Bonet, 1
25690, Vilanova de la Barca, Lleida